






AI-6 kg	AI-15 kg	AI-30 kg	AI-50 kg	dimens. 300 x 300 mm
* AI-60 kg	* AI-120 kg	dimens. 400 x 400 mm
* AI-150 kg	* AI-300 kg	dimens. 600 x 600 mm
AI-600 kg	dimens. 800 x 800 mm

OPZIONI A RICHIESTA :	OPTIONS ON REQUEST :
- Maggiorazione per portate fuori standard.....	- Additional price for non-standard platforms.....
- Versione ATEX  II 1 G  II 2 D (zone 0-1-2-21-22).....	- ATEX version  II 1 G  II 2 D (zone 0-1-2-21-22).....
- Colonna inox portaindicator (Ø 38 mm, h 700 mm) con staffa in acciaio inox per fissaggio alla piattaforma.....	- Indicator stainless steel stand (Ø 38 mm, h 700 mm) with stainless steel bracket for platform mounting.....
- Colonna inox portaindicator (Ø 38 mm, h 700 mm) con staffa in acciaio verniciato per fissaggio alla piattaforma.....	- Indicator stainless steel stand (Ø 38 mm, h 700 mm) with painted steel bracket for platform mounting.....

 **APPROVAZIONE OIML R60 C3**
C3 OIML R60 C3 APPROVED


 **AI 6, 15, 30, 50, 150, 300 kg: a richiesta versione approvata OIML R60 C4**
C4 AI 6, 15, 30, 50, 150, 300 kg: on request OIML R60 C4 version approved

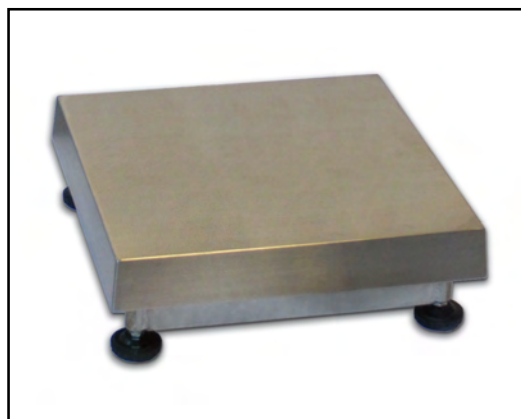

- STRUTTURA IN TUBOLARI IN ACCIAIO INOX AISI 304
- PIANO DI CARICO INOX AISI 304 APPOGGIATO
- CELLA DI CARICO IN LEGA D'ALLUMINIO IP65
- PIEDINI IN ACCIAIO INOX E POLIAMMIDE
- ATTACCO PER COLONNA PORTAINDICATORE
- AISI 304 STEEL TUBULAR STRUCTURE
- AISI 304 STEEL LOADING TOP (laid)
- SINGLE-POINT IP65 ALUMINIUM LOAD CELL
- STAINLESS STEEL & POLYAMID FEET
- CONNECTION FOR INDICATOR STAND

* PER MOD.: AI-60/120/150/300 LA CELLA DI CARICO VIENE FORNITA CON KIT WATERPROOF INOX + GOMMA.

FOR MODELS: AI-60/120/150/300 THE LOAD CELL IS PROVIDED WITH STAINLESS STEEL WATERPROOF KIT + RUBBER.

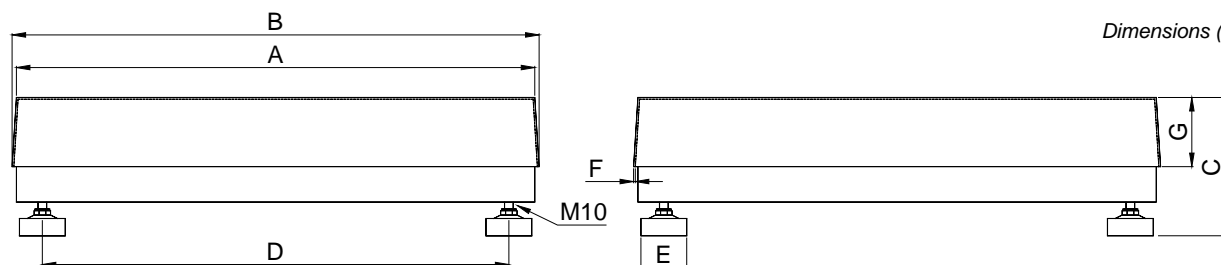

Dimensions (mm)

	Load Cells capacities	A	B	C	D	E	F	G	Weight
AI kg 6, 15, 30, 50	10 - 20 - 50 - 100 kg	300	310	130	235	55	1.5	60	7 kg
AI kg 60, 120	100 - 200 kg	400	410	130	340	55	1.5	60	11 kg
AI kg 150, 300	200 - 500 kg	600	610	160	540	55	2	80	23 kg
AI kg 600	1000 kg	800	815	170	740	55	2	100	61 kg

COLONNA con STAFFA
STAND with BRACKET



	AI 6 - 120	AI 15 - 300	AI 600
SCHERMO (SHIELD)			
+ SEGNALE (+SIGNAL)	VERDE (GREEN)	VERDE (GREEN)	BLU (BLUE)
+ ALIMENT. (+EXCIT.)	ROSSO (RED)	ROSSO (RED)	ROSSO (RED)
★★ + SENSE (+REF/SENSE)	BLU (BLUE)	BLU (BLUE)	MARRONE (BROWN)
- SEGNALE (-SIGNAL)	BIANCO (WHITE)	BIANCO (WHITE)	BIANCO (WHITE)
- ALIMENT. (-EXCIT.)	NERO (BLACK)	NERO (BLACK)	GIALLO (YELLOW)
★★ - SENSE (+REF/SENSE)	MARRONE (BROWN)	GIALLO (YELLOW)	NERO (BLACK)

★★ Dove previsto (where provided)