



Series load cells: FCAL - FCAX - FTK - FTKL - FTP - FT-P - FTZ

Up to 2000 kg application range

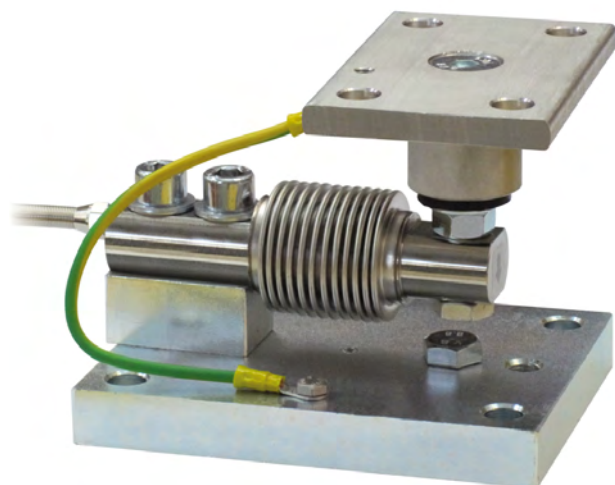

T12FCAGP

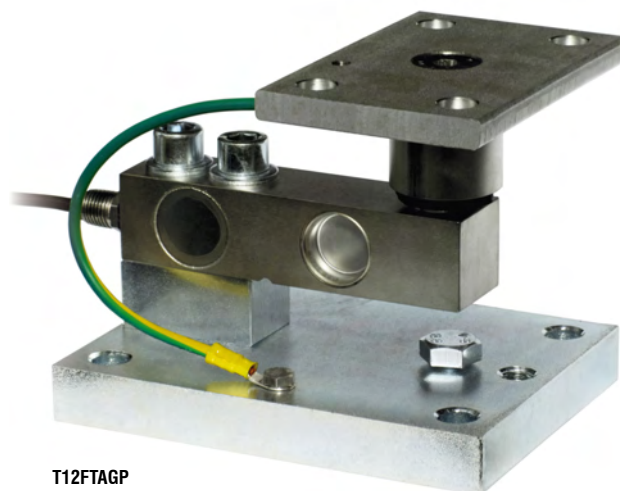

T12FTAGP

MAX STATIC LOAD kg	FOR LOAD CELLS	NET WEIGHT (kg)	CODE
1500	FCAL - FCAX	4	T12FCAGP
2000	FTK - FTKL - FTP - FT-P - FTZ	4	T12FTAGP




Load cell not included

DESCRIPTION

- Upper plate with a compression joint in AISI 304 stainless steel and rubber.
- Lower plate and block in galvanized steel.
- Compensation for any misalignments of the support plates of the structure.
- Locking screw to avoid damage during transport and installation.
- Can be used for systems with at least 3 supports.

DIMENSIONS AND TECHNICAL SPECIFICATIONS

- During the transport and installation the lock (*) must touch under the load cell. After installation, move the lock away from the load cell.
- Interconnect the lower plates to the earthing.
- In case of structure with four-point support, if one-point does not touch the upper part of the mounting kit, you must proceed to insert a shim before fixing the bolts.
- For the load cell fixing screws (*), provide a tightening torque of 79 Nm.

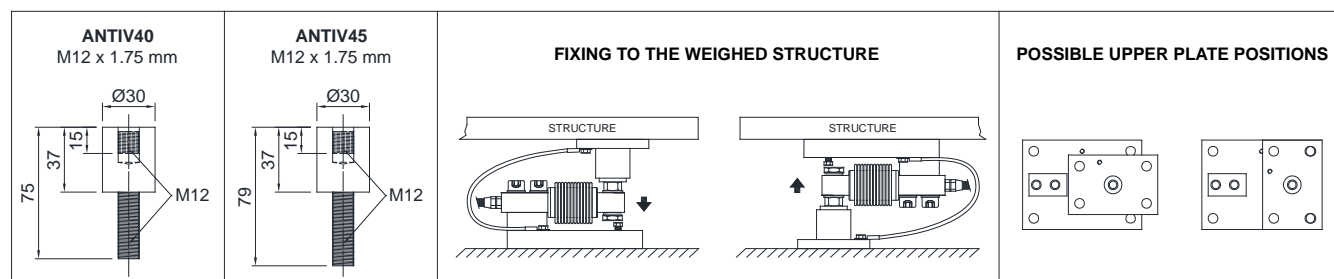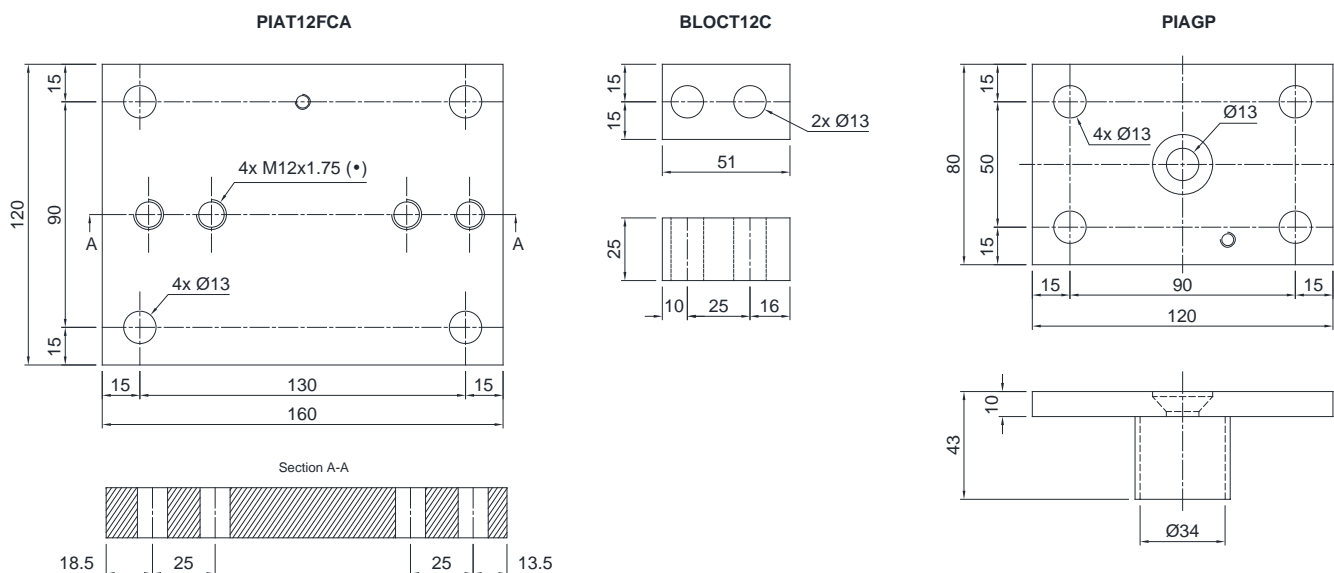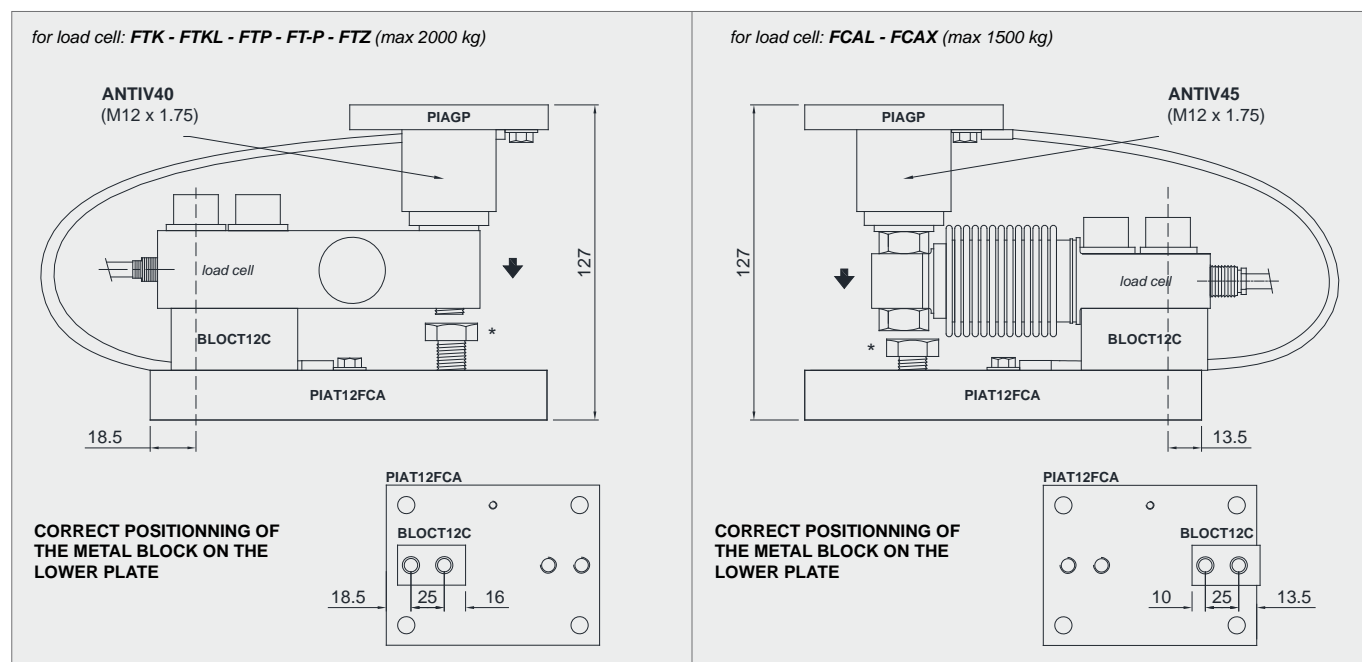

The Company reserves the right to make changes to the technical data, drawings and images without notice.