
CONVLAU

RS485-RS232 CONVERTER

LAUMAS®

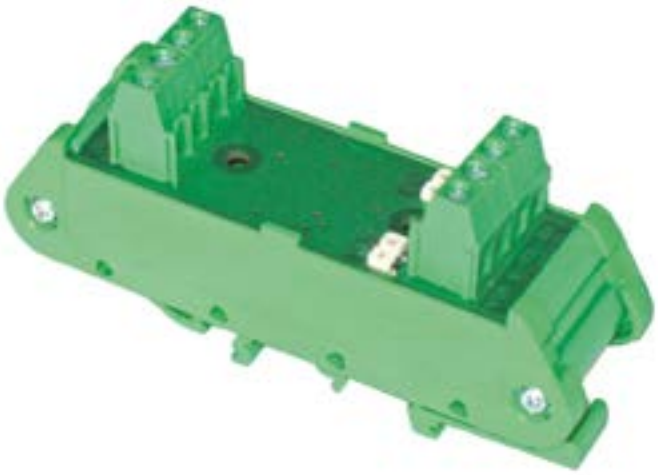

DESCRIPTION

- The converter connects a RS485 instrument to a PC or PLC equipped with RS232 serial port.
- Automatic receive/transmission selection (RS485 half duplex) or fixed (RS422 full-duplex).
- Back panel mounting on Omega/DIN rail or in waterproof box.
- 4 LEDs indicate the active RS232 data reception/transmission status, the presence of power supply and the presence of RS232 connection.
- Dimensions : 27x93x44 mm.

CERTIFICATIONS

UK CA Equivalent of the CE marking for the United Kingdom

TECHNICAL FEATURES

Power supply and consumption	5÷26 VDC ±15%; 0.5W
RS232 serial port	
Baud rate	115200 (bit/s)
Cable length	15 m
RS485 serial port	
Baud rate	115200 (bit/s)
Cable length	1200 m / 9600 (bit/s)
Complying to standards	EN55022:2010 - EN61000-6-2:2005 - EN6100-6-4:2007
Humidity (condensate free)	85%
Storage temperature	-20°C +60°C
Working temperature	-10°C +50°C

The Company reserves the right to make changes to the technical data, drawings and images without notice.

LAUMAS S.r.l.
Fax: (+39) 0521 681091
• SALES DEPARTMENT: sales@laumas.it
• Phone: (+39) 0521 683124

ISO 9001
ISO 14001