
TELP


ASSEMBLY AND POSITIONING FOR PLATFORMS WITH PIT FRAME



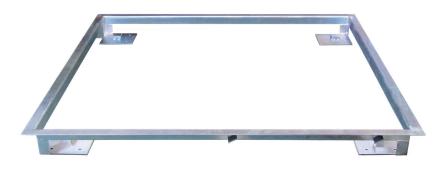


- 1. Move outside the 4 centering plates of the pit frame.
- 2. Insert the platform.
- 3. Remove the inspectable corners of the platform to access the feet and level the platform to the pit frame. Tighten the feet with the locknut.
- 4. Center the platform with respect to the frame by levering with a screwdriver on the top edge of the frame.
- 5. Secure the platform to the pit frame, pushing the centering plates against the platform feet and tighten the self-locking nut with a 13 mm tubular socket wrench.
- 6. Replace the 4 inspectable corners of the platform in their initial position.

DIMENSIONS (mm)

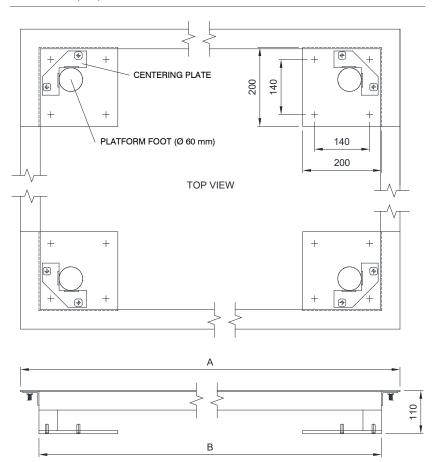

	Α	В
TELP800INOX	916 x 916	822 x 822
TELP1000INOX	1116 x 1116	1022 x 1022
TELP1250/TELP1250INOX	1366 x 1366	1272 x 1272
TELP1200P1500	1316 x 1616	1222 x 1522
TELP1500/TELP1500INOX	1616 x 1616	1522 x 1522

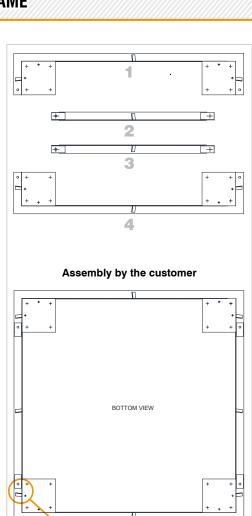



TELP

ASSEMBLY AND POSITIONING FOR PLATFORMS WITH PIT FRAME





- 1. Dig a rough pit based on the size of the frame.
- Prepare the electrical connection from the platform to the weight indicator with a Ø50 mm wireway and 45° fittings for the signal output cable to the weight indicator.
- 3. Make a custom-made wooden formwork for the frame.
- 4. Place the frame with the formwork inside the pit keeping the frame suspended from the bottom of the pit.
- 5. Level the frame.
- 6. Proceed with the concrete casting, checking again the positioning of the frame.
- 7. In the case of positioning exposed to rain / washes, proceed at first to lay the concrete base creating a slope without supporting the feet of the frame. After drying the concrete, make 4 planar concrete blocks under the relative supporting feet of the frame.


EXCAVATION ROUGH PIT - Proportions for excavation

Platform dimensions: 1500x1500xh90 mm Pit frame dimensions: 1616x1616xh110 mm Rough pit dimensions: 2000x2000xh200 mm

Use the same proportion for other platform / frame sizes.



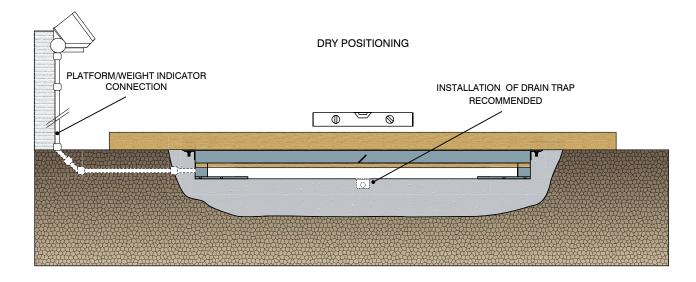

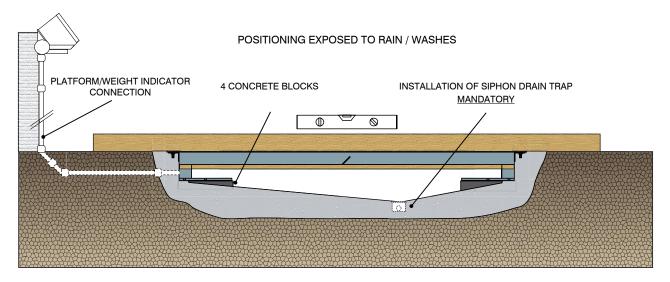

The Company reserves the right to make changes to the technical data, drawings and images without notice.