

# CASTLM8I

STAINLESS STEEL BOX FOR TLM8 WEIGHT TRANSMITTER


LAUMAS®



*TLM8 instrument not included.  
To know the functions and technical features of  
the instrument, refer to the dedicated data sheet.*

- AISI 304 stainless steel box for TLM8 multichannel weight transmitter.
- Dimensions: 280x206x85 mm; with bracket: 290x206x187 mm.
- Adjustable stainless steel bracket included.
- IP68 protection rating.
- 10 M12x1.5 cable glands.
- 5-key keyboard.
- TEST key for direct access to the diagnostic functions.

## DIMENSIONS (mm)

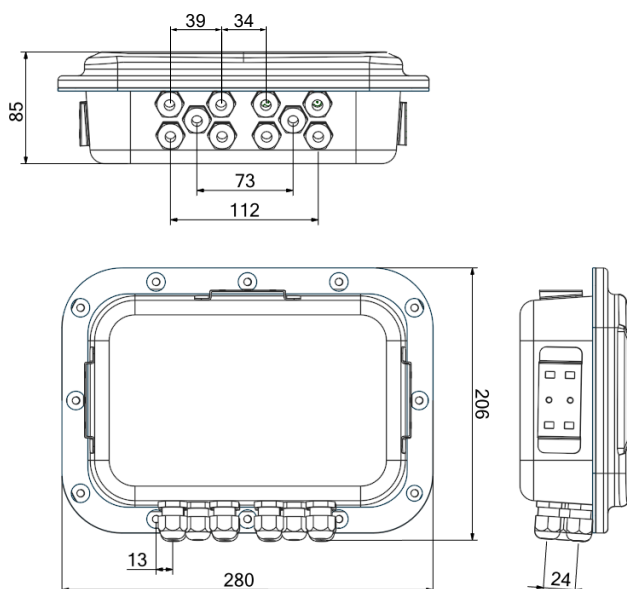

### CERTIFICATIONS



Equivalent of the CE marking for the United Kingdom

#### CERTIFICATIONS ON REQUEST




Declaration of conformity + IP69K marking protection rating


Water protection in case of high-pressure or steam jet cleaning (test: pressurized water is sprayed from a distance of max 150 mm)  
Water pressure: 100 bar; temperature: 80 °C; test duration: 250 seconds (reference standard: DIN 40050-9)

### AVAILABLE VERSIONS

#### DESCRIPTION



Installation: wall and desk (bracket included),  
front panel (option on request - drilling template: 248x160 mm).



**X version: ATEX (zone 2-22)**

Installation: wall and desk (bracket included),  
front panel (option on request - drilling template: 248x160 mm).

### OPTIONS ON REQUEST

#### ACCESSORIES



Kit for front panel mounting

*Compatible with standard version*

*Compatible with X version.*

*The Company reserves the right to make changes to the technical data, drawings and images without notice.*