CASTLM8I

STAINLESS STEEL BOX FOR TLM8 WEIGHT TRANSMITTER






TLM8 instrument not included.
To know the functions and technical features of the instrument, refer to the dedicated data sheet.

- AISI 304 stainless steel box for TLM8 multichannel weight transmitter.
- Dimensions: 280x206x85 mm; with bracket: 290x206x187 mm.
- Adjustable stainless steel bracket included.
- IP68 protection rating.
- 10 M12x1.5 cable glands.
- 5-key keyboard.
- TEST key for direct access to the diagnostic functions.

DIMENSIONS (mm)

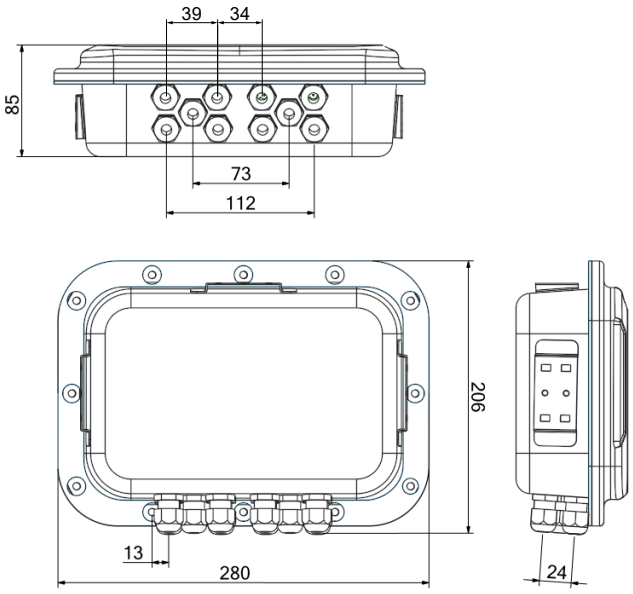

LAUMAS S.r.l.
Fax: (+39) 0521 681091
• SALES DEPARTMENT: sales@laumas.it
• Phone: (+39) 0521 683124

ISO 9001
ISO 14001

www.laumas.com

CASTLM8I

STAINLESS STEEL BOX FOR TLM8 WEIGHT TRANSMITTER

CERTIFICATIONS

UK CA — Equivalent of the CE marking for the United Kingdom

CERTIFICATIONS ON REQUEST

IP69K — Declaration of conformity + IP69K marking protection rating
Water protection in case of high-pressure or steam jet cleaning (test: pressurized water is sprayed from a distance of max 150 mm)
Water pressure: 100 bar; temperature: 80 °C; test duration: 250 seconds (reference standard: DIN 40050-9)

AVAILABLE VERSIONS

	DESCRIPTION
	Installation: wall and desk (bracket included), front panel (option on request - drilling template: 248x160 mm).
	**X version**: **ATEX (zone 2-22)** Installation: wall and desk (bracket included), front panel (option on request - drilling template: 248x160 mm).

OPTIONS ON REQUEST

	ACCESSORIES
	Kit for front panel mounting *Compatible with standard version.* *Compatible with X version.*

The Company reserves the right to make changes to the technical data, drawings and images without notice.

LAUMAS S.r.l. • SALES DEPARTMENT: sales@laumas.it
Fax: (+39) 0521 681091 • Phone: (+39) 0521 683124

ISO 9001
ISO 14001