


Series load cells: **CBL - CBX - CX**

Up to 15000 kg application range

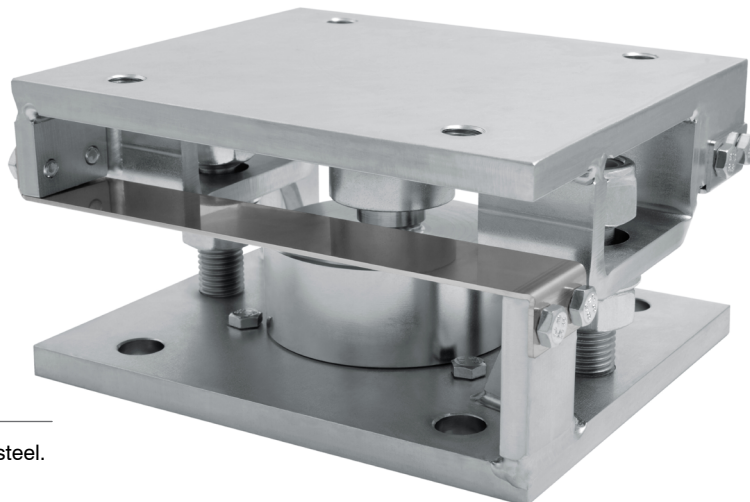


### DESCRIPTION

- Upper and lower plates in galvanized S355JR construction steel.
- AISI 304 stainless steel laminas against lateral forces.
- Anti-tilt constraint consisting of two threaded rods with self-locking nut.



MAX STATIC LOAD	kg	FOR LOAD CELLS	NET WEIGHT (kg)	CODE
15000		CBL (250 ÷ 12500 kg) - CBX (15000 kg) CX (1000 ÷ 15000 kg)	5.7	Z10000

Load cell not included.

HORIZONTAL CONSTRAINTS  
ORIENTATION  
IN STRUCTURES WITH  
3-POINT SUPPORT



HORIZONTAL CONSTRAINTS  
ORIENTATION  
IN STRUCTURES WITH  
4-POINT SUPPORT

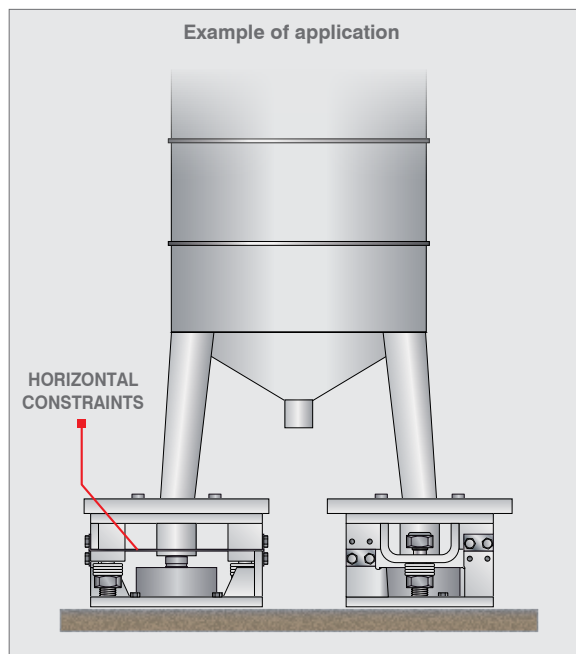



### COMPLEMENTARY ACCESSORIES

	DESCRIPTION	CODE
	AISI 304 stainless steel shim: h 0.5 mm h 1 mm h 2 mm	SPVZ1005 SPVZ101 SPVZ102


### DIMENSIONS AND TECHNICAL SPECIFICATIONS

Upper and lower plates **2** must rest completely on not deformable surfaces. To ensure the stability of the structure, the system designer must predict any further precaution against side shifts and anti-tilt in function of: knocks and vibrations, wind effect, seismic conditions and hardness of support structure.

- Install the weighed system using only the mounting kit without the load cell **1** and inserting in its place a piece of pipe (1-2 mm higher than the load cell).
- To finish the installation (weldings, etc..), remove the piece of pipe and then removing the bolts to fix the the load cell **7** insert the load cell **1** in mounting kit.
- Connect lower and upper plates **2** to the earthing system then loosen nuts **5**; verify that the threaded rod **4** slides into the hole; turn anti-tilt nuts **6** to a distance of 1 mm from plate.
- Tighten the three bolts to fix the load cell **7**.

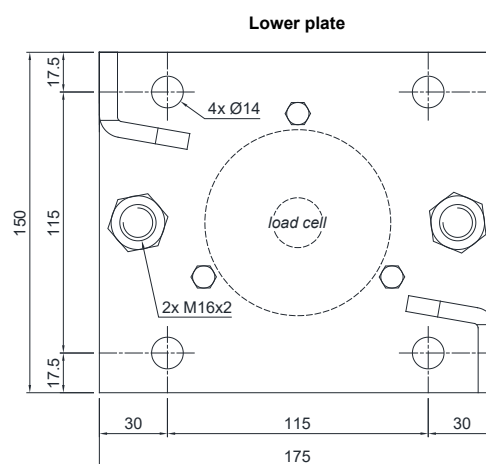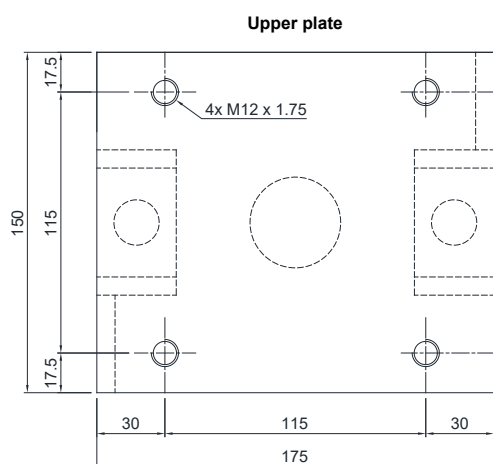

- 1** Load cell.
- 2** Upper and lower plates in galvanized S355JR construction steel.
- 3** AISI 304 stainless steel laminas with horizontal constraint function.
- 4** Threaded rod.
- 5** Nut to be used as jack.
- 6** Anti-tilt self-locking nut.
- 7** M6 bolts to fix the load cell.

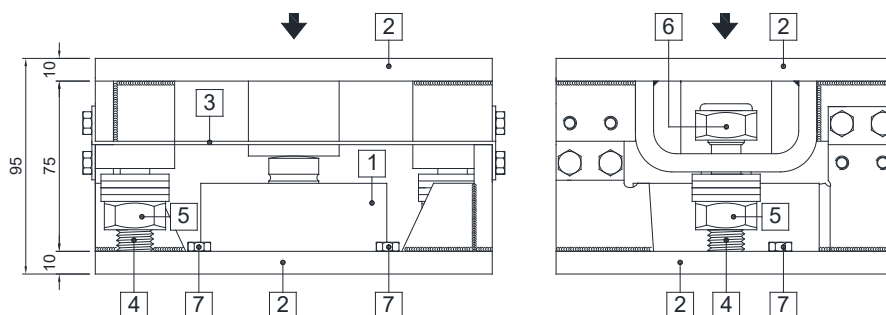

The Company reserves the right to make changes to the technical data, drawings and images without notice.