




DESCRIPTION

- W100RIP remote display.
- ADPE explosion proof box in light aluminum alloy, equipped with heat-resistant transparent tempered glass window:

| ATEX marking | IECEx marking |
|---|---|
| II 2 GD Ex d IIC T6 Gb Ex tb IIIC T85°C Db IP66 (-20 °C ≤ Ta ≤ +40 °C) BVI 14 ATEX 0007 | Ex d IIC T6 Gb Ex tb IIIC T85°C Db IP66 (-20 °C ≤ Ta ≤ +40 °C) IECEx EPS 14.0017 |

- The instrument can be configured and managed using the free "Instrument Manager" PC software, which you can download from www.laumas.com.

DIMENSIONS (mm)

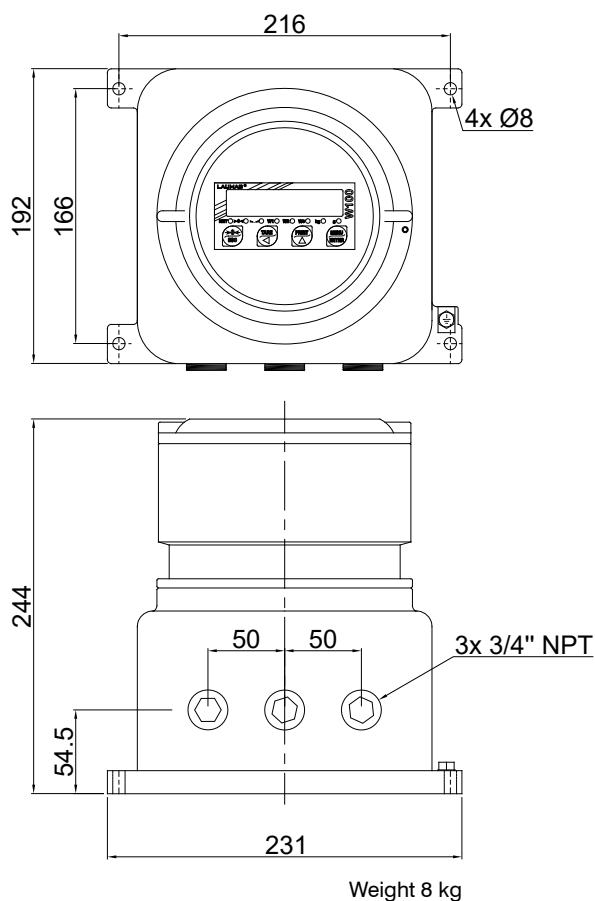

CERTIFICATIONS



Equivalent of the CE marking for the United Kingdom

TECHNICAL FEATURES

| | |
|-------------------------------|--|
| Power supply and consumption | 12÷24 VDC ±10%; 5 W |
| Display range | ±999999 |
| Decimals • Display increments | 0÷4 |
| Relay outputs | 5 - max 115 VAC/150 mA |
| Serial ports | RS485, RS232 |
| Baud rate | 2400, 4800, 9600, 19200, 38400, 115200 (bit/s) |
| Humidity (condensate free) | 85% |
| Storage temperature | -30 °C +80 °C |
| Working temperature | -20 °C +60 °C |

TREATMENT



Treatment for metallic surfaces by "off-shore" painting for ADPEW100 box.