
TFA2000/5000


MOUNTING KIT for SHEAR BEAM load cells

Series load cells: **FTK - FTKL - FTP - FT-P - FTZ**

Up to 5000 kg application range

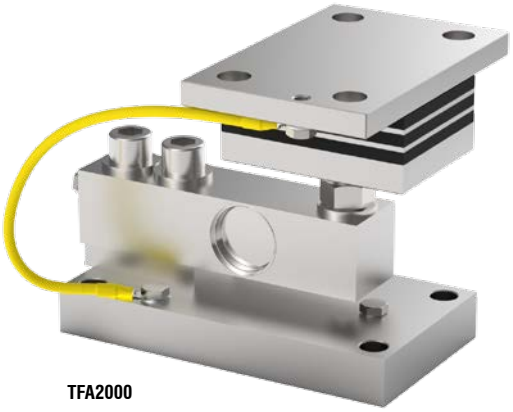

TFA2000

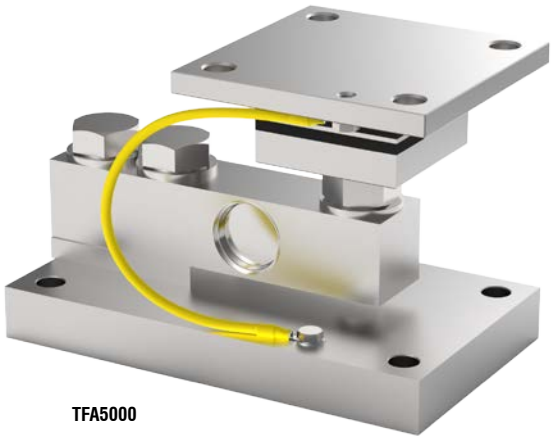

TFA5000

MAX STATIC LOAD kg	FOR LOAD CELLS	MODEL
2000	FTK - FTKL - FTP - FT-P - FTZ	TFA2000
5000	FTK - FTP - FTZ	TFA5000

Load cell not included.

DESCRIPTION


- Designed for weighing systems subject to vibration.
- Vibration isolator in AISI 304 stainless steel and NBR rubber.
- Lower plate and block in AISI 304 stainless steel.
- Compensation for any misalignments of the support plates of the structure.
- Locking screw to avoid damage during transport and installation (TFA2000).
- Can be used for systems with at least 3 supports.
- Adjustable height.


TFA2000/5000


MOUNTING KIT for SHEAR BEAM load cells


DIMENSIONS AND TECHNICAL SPECIFICATIONS


- TFA2000: during the transport and installation the lock (*) must touch under the load cell. After installation, move the lock away from the load cell.
- Interconnect the plates to the earthing.
- In case of structure with four-point support, if one-point does not touch the upper part of the mounting kit, screw or unscrew the vibration isolator (±3 mm) or insert a shim before fixing the bolts.

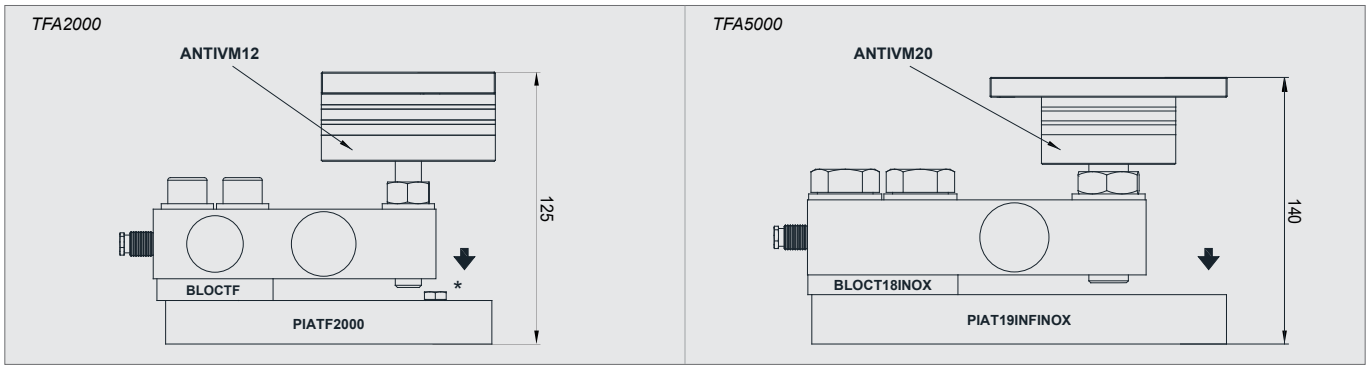

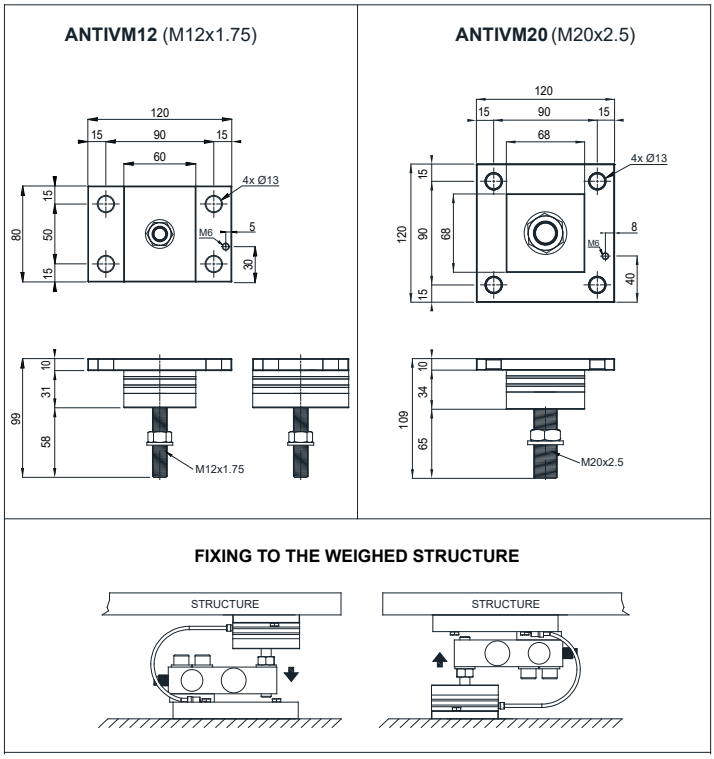

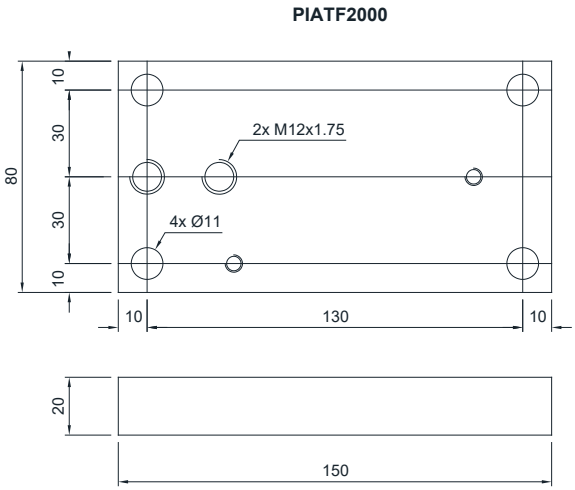

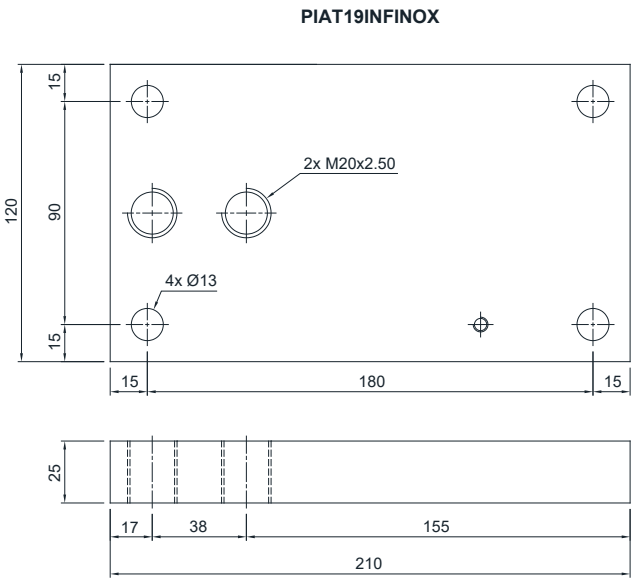

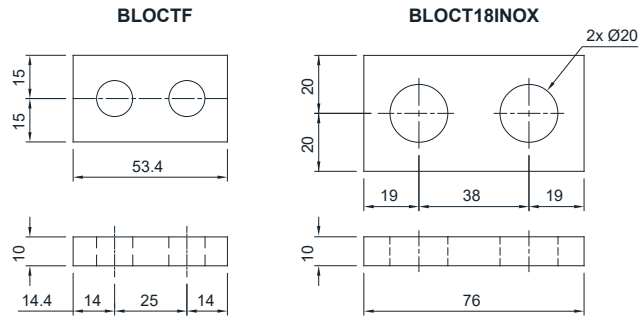

The Company reserves the right to make changes to the technical data, drawings and images without notice.

LAUMAS S.r.l. • SALES DEPARTMENT: sales@laumas.it
Fax: (+39) 0521 681091 • Phone: (+39) 0521 683124

ISO 9001
ISO 14001