
PS

MOUNTING KIT for BENDING/SHEAR BEAM load cells

Series load cells: **FTP - FTZ - FTK**

Up to 10000 kg application range

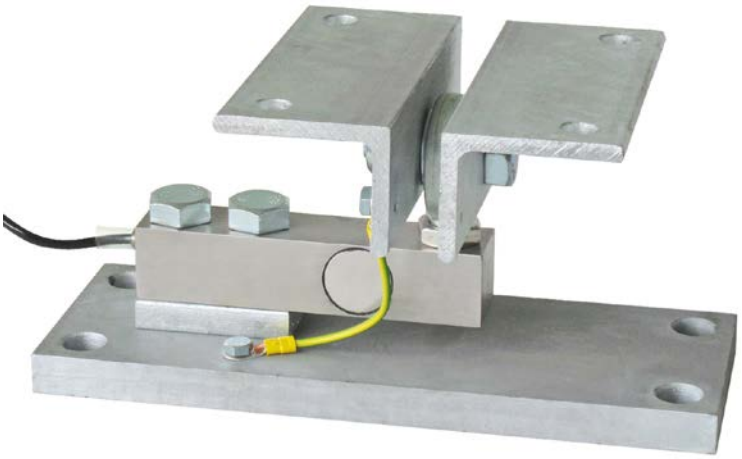

MAX STATIC LOAD kg	FOR LOAD CELLS	NET WEIGHT (kg)	MODEL
5000	FTK - FTP - FTZ (3000 - 5000 kg)	10.5	PS
10000	FTP	15.5	PS10T

Load cell not included.

DESCRIPTION


- Upper plate, lower plate and block in galvanized steel.
- Constraint against lateral forces and anti-tilt by ball-and-socket joint.
- Compensation for any misalignments of the support plates of the structure.
- Adjustable height.


PS


MOUNTING KIT for BENDING/SHEAR BEAM load cells

DIMENSIONS AND TECHNICAL SPECIFICATIONS

- Interconnect the plates to the earthing.
- In case of structure with four-point support, proceed to the height adjustment, if one-point does not touch the upper part of the mounting kit.
- For the load cell fixing screws (•), provide a tightening torque of 290 Nm for PS and 690 Nm for PS10T.

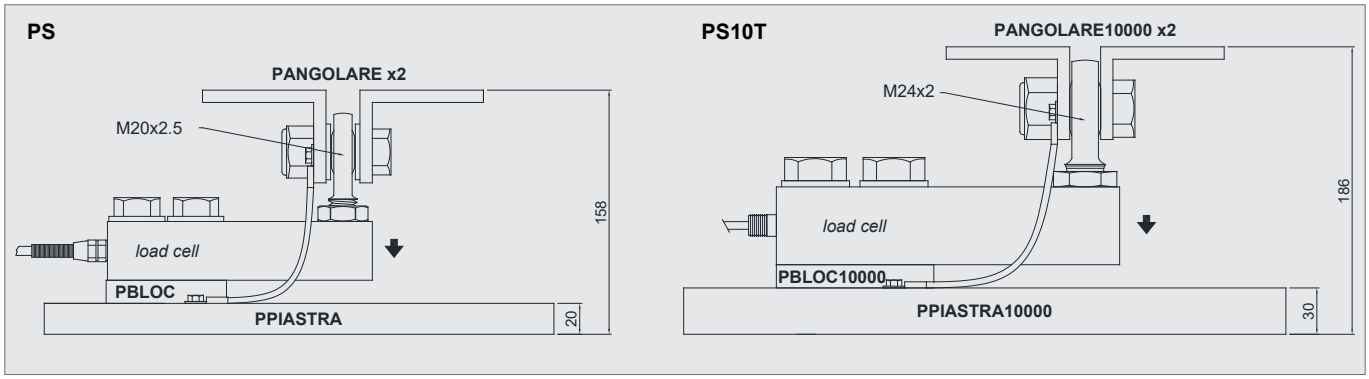

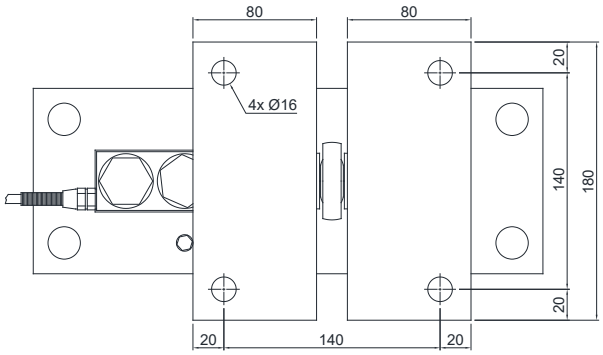


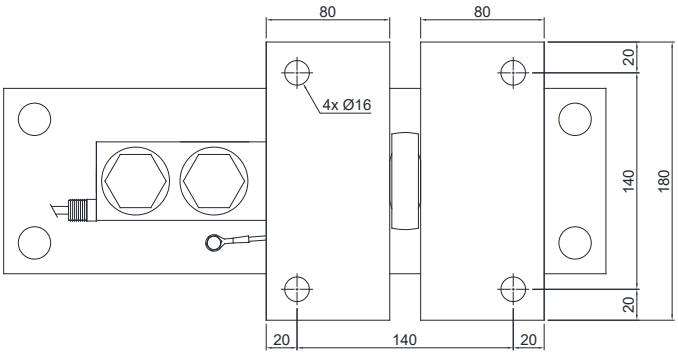


PPIASTRA




PPIASTRA10000

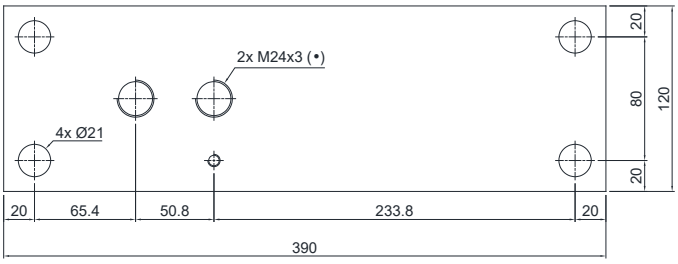


PBLOC



PBLOC10000



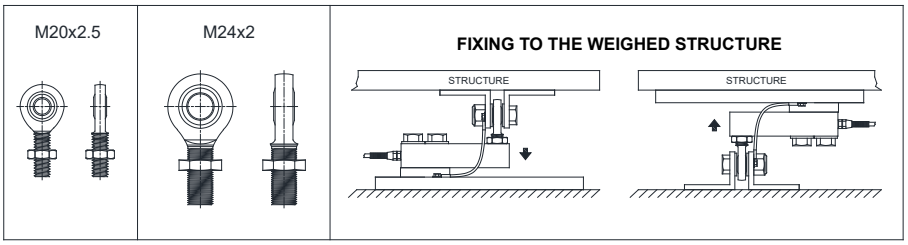

The Company reserves the right to make changes to the technical data, drawings and images without notice.

LAUMAS S.r.l.
Fax: (+39) 0521 681091
• SALES DEPARTMENT: sales@laumas.it
• Phone: (+39) 0521 683124

ISO 9001
ISO 14001