


Series load cells: **CLS**

Up to 5000 kg application range

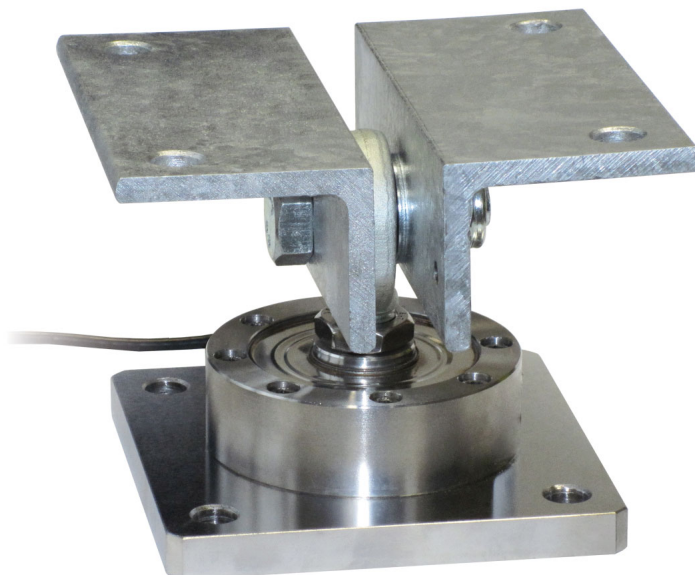

kg	FOR LOAD CELLS	NET WEIGHT (kg)	CODE
2000	CLS 1000-2000 kg	3.6	PSCLS2000
5000	CLS 5000 kg	3.6	PSCLS

*Load cell not included.*



### DESCRIPTION

- Adjustable upper plate in hot galvanized steel.
- Constraint against lateral forces and anti-tilt by ball-and-socket joint
- Compensation for any misalignments of the support plates of the structure.
- Adjustable height.

## MOUNTING KIT for COMPRESSION - LOW PROFILE load cells

### DIMENSIONS AND TECHNICAL SPECIFICATIONS

- Finished the installation by means of a copper wire, connect the upper supporting plate with the lower supporting plate, then connect all the lower plates to the earthing system.

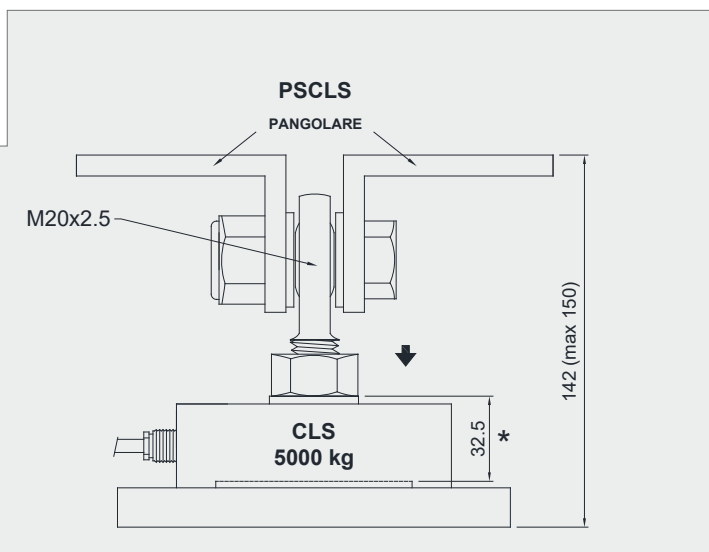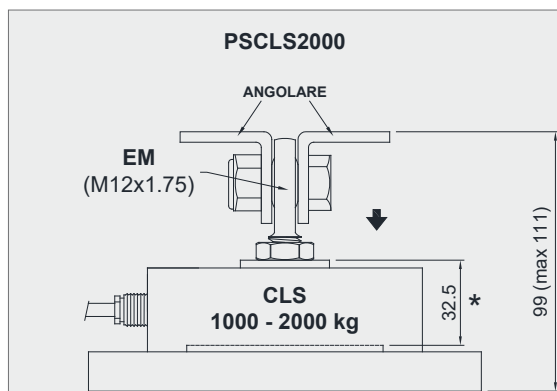

\* WARNING! Max dimension to insert the bolt to allow the cell to perform properly

