
TFPS2000

MOUNTING KIT for BENDING/SHEAR BEAM load cells

Series load cells: **FTK - FTKL - FTP - FT-P - FTZ**

Up to 2000 kg application range

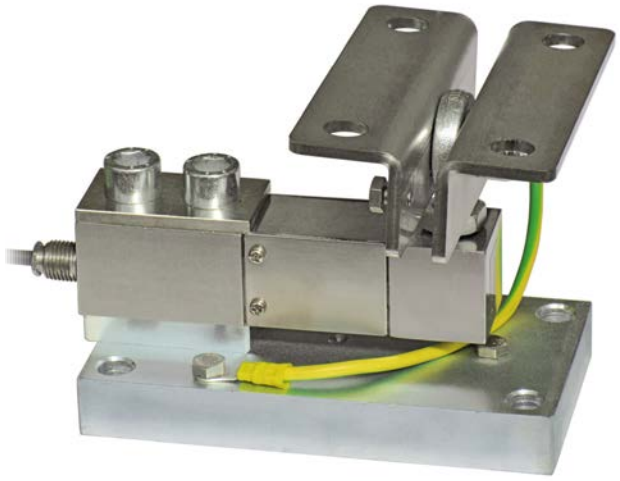

MAX STATIC LOAD kg	FOR LOAD CELLS	NET WEIGHT (kg)	MODEL
2000	FTK - FTKL - FTP - FT-P - FTZ	2.7	TFPS2000
2000	FTK - FTKL - FTP - FT-P - FTZ	2.7	TFPS2000INOX

Load cell not included.

DESCRIPTION


- AISI 304 stainless steel upper plate.
- Lower plate and block in galvanized steel (TFPS2000) or in stainless steel (TFPS2000INOX).
- Constraint against lateral forces and anti-tilt by means of ball-and-socket joint with nut in galvanized C40 steel (TFPS2000) or in stainless steel (TFPS2000INOX).
- Compensation for any misalignments of the support plates of the structure.
- Adjustable height.
- Locking screw to avoid damage during transport and installation.


TFPS2000


MOUNTING KIT for BENDING/SHEAR BEAM load cells


DIMENSIONS AND TECHNICAL SPECIFICATIONS


- During the transport and installation the lock (*) must touch under the load cell. After installation, move the lock away from the load cell.
- Interconnect the plates to the earthing.
- In case of structure with four-point support, if one-point does not touch the upper part of the mounting kit, you must proceed to insert a shim before fixing the bolts.
- For the load cell fixing screws (•), provide a tightening torque of 79 Nm.

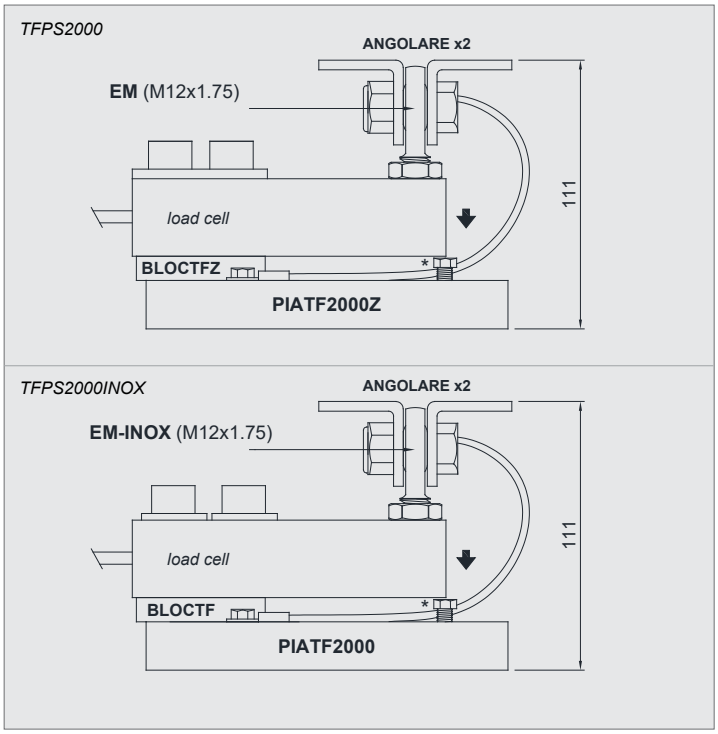




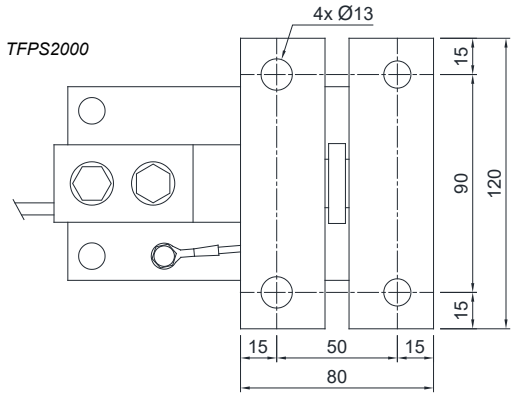

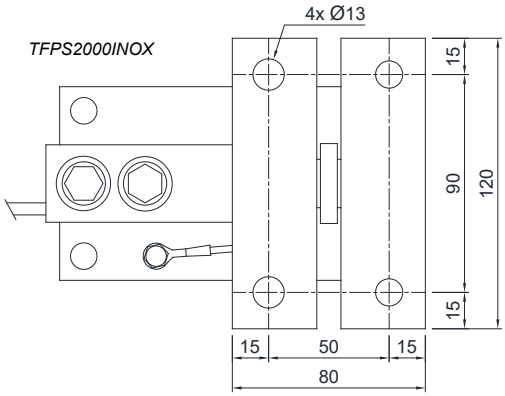

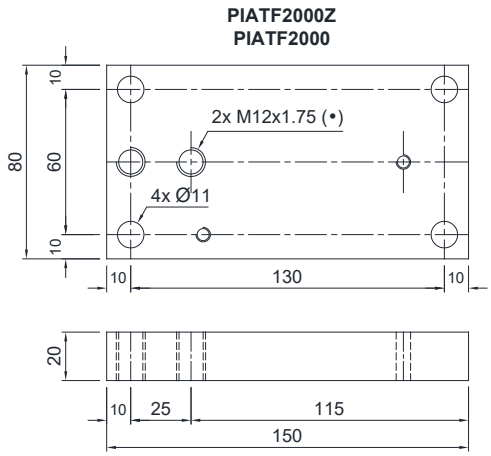

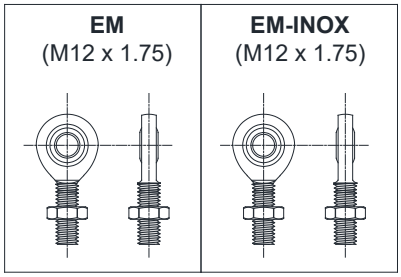

The Company reserves the right to make changes to the technical data, drawings and images without notice.

LAUMAS S.r.l.
Fax: (+39) 0521 681091
• SALES DEPARTMENT: sales@laumas.it
• Phone: (+39) 0521 683124

ISO 9001
ISO 14001