
PX - PXI


PALLET SCALE - 4 LOAD CELLS IP68

LAUMAS®

Capacity up to 3000 kg

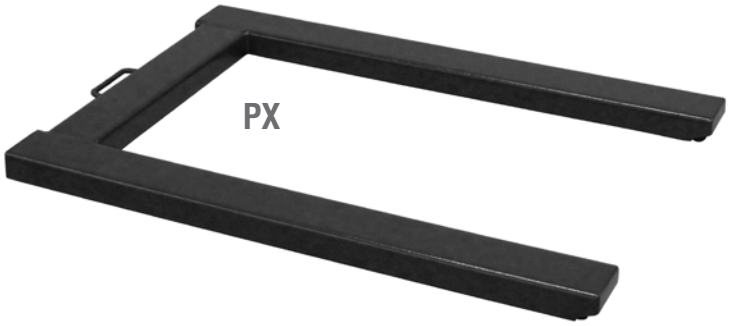

- **PX:**
  - Painted steel structure.
  - 4 load cells FTP 1000 kg
    AISI 420 stainless steel - IP68 (on request: IP69K).
  - Galvanized steel adjustable feet,
    self-centering on sphere.
- **PXI:**
  - AISI 304 stainless steel structure.
  - 4 load cells FT-P 1000 kg
    17-4 PH stainless steel - IP68 (on request: IP69K).
  - AISI 304 stainless steel adjustable feet,
    self-centering on sphere.
- IP67 stainless steel junction box with equalization board and 6-wire output cable (length: 5 m).
- Carrying handle and wheels.

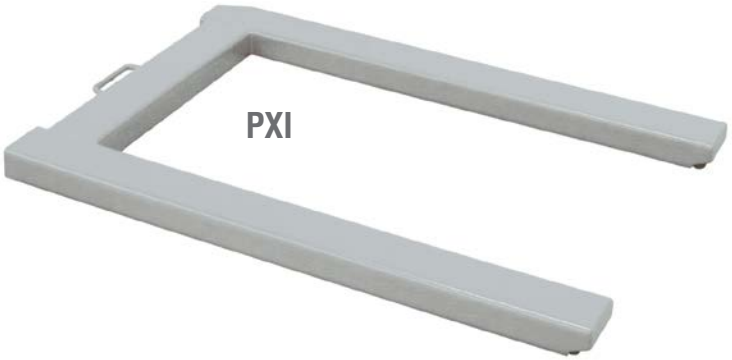

CAPACITY	kg	ACCURACY CLASS C3		DIMENSION (mm)	NET WEIGHT (kg)	MODEL
3000		•	•	1250 x 840	38	PX
3000		•	•	1250 x 840	38	PXI

└┘ ON REQUEST

CERTIFICATIONS

OIML R60 C3

Equivalent of the CE marking for the United Kingdom

CERTIFICATIONS ON REQUEST

IP69K	Declaration of conformity + IP69K marking protection rating *Water protection in case of high-pressure or steam jet cleaning (test: pressurized water is sprayed from a distance of max 150 mm)* *Water pressure: 100 bar; temperature: 80 °C; test duration: 250 seconds (reference standard: DIN 40050-9)*
	ATEX *(zone 2-22)*
	ATEX *(zone 1-21)*
	IECEx *(zone 1-21)*


Rev. 0.0

LAUMAS S.r.l.
Fax: (+39) 0521 681091
• SALES DEPARTMENT: sales@laumas.it
• Phone: (+39) 0521 683124

PX - PXI


PALLET SCALE - 4 LOAD CELLS IP68

DIMENSIONS (mm)

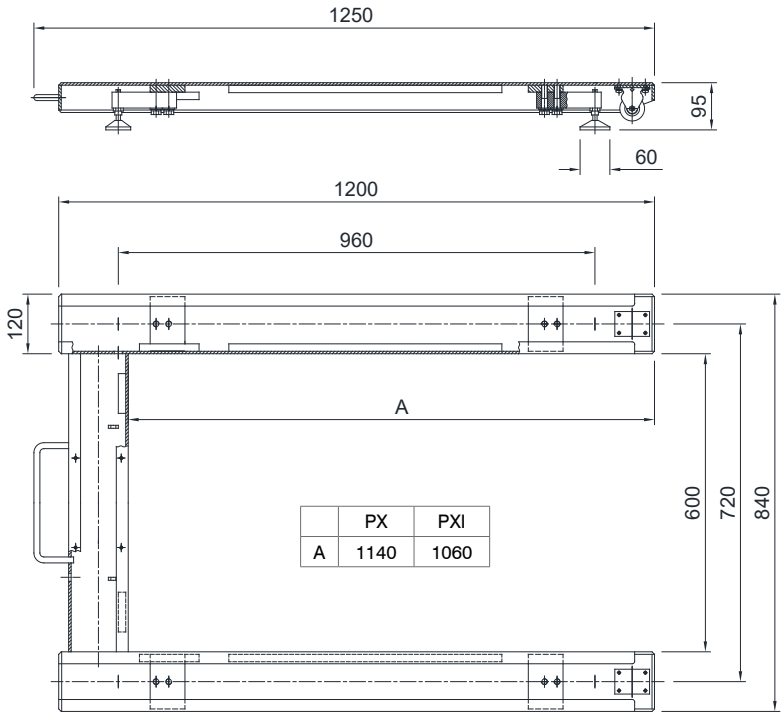

	PX	PXI
A	1140	1060

ELECTRICAL CONNECTIONS



SHIELD	
+ SIGNAL	GREEN
+ EXCITATION + REF./SENSE	RED BLUE
- SIGNAL	WHITE
- EXCITATION - REF./SENSE	BLACK YELLOW

- where provided



OPTIONS ON REQUEST

	DESCRIPTION
	Stainless steel indicator-holder column (Ø38 mm, height 700 mm). - Painted steel mobile pedestal. - Stainless steel mobile pedestal.
	Non-standard capabilities.

The Company reserves the right to make changes to the technical data, drawings and images without notice.

Rev. 0.0

LAUMAS S.r.l.
Fax: (+39) 0521 681091
• SALES DEPARTMENT: sales@laumas.it
• Phone: (+39) 0521 683124

ISO 9001
ISO 14001

www.laumas.com