
P

PAINTED STEEL PLATFORM - 4 LOAD CELLS IP68

Capacity up to 3000 kg



- Painted steel platform.
- 4 FTP load cells in AISI 420 stainless steel - IP68 (on request: IP69K).
- IP67 stainless steel junction box with equalization board and 6-wire output cable (length: 5 m).
- Inspectable compartments for load cells and junction box.
- Galvanized steel adjustable feet, self-centering on sphere.
- Two M12 holes for lifting eyebolts.





CAPACITY kg	ACCURACY CLASS C3		DIMENSION (mm)	WEIGHT (kg)	LOAD CELLS
1500	•	•	1250 x 1250	117	FTP 500 kg
1500	•	•	1200 x 1500	131	FTP 500 kg
1500	•	•	1500 x 1500	156	FTP 500 kg
3000	•	•	1250 x 1250	117	FTP 1000 kg
3000	•	•	1200 x 1500	131	FTP 1000 kg
3000	•	•	1500 x 1500	156	FTP 1000 kg

└┘ ON REQUEST

CERTIFICATIONS

OIML R60 C3

Equivalent of the CE marking for the United Kingdom

CERTIFICATIONS ON REQUEST

IP69K — Declaration of conformity + IP69K marking protection rating
Water protection in case of high-pressure or steam jet cleaning (test: pressurized water is sprayed from a distance of max 150 mm)
Water pressure: 100 bar; temperature: 80 °C; test duration: 250 seconds (reference standard: DIN 40050-9)

ATEX *(zone 2-22)*

ATEX *(zone 1-21)*


IECEx *(zone 1-21)*


Rev. 0.0

LAUMAS S.r.l.
Fax: (+39) 0521 681091
• SALES DEPARTMENT: sales@laumas.it
• Phone: (+39) 0521 683124

PAINTED STEEL PLATFORM - 4 LOAD CELLS IP68

DIMENSIONS (mm)

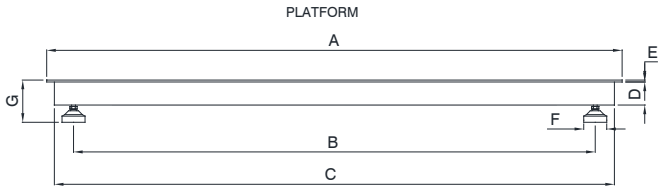

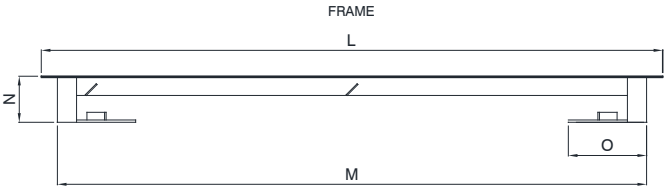


PLATFORM

A	B	C	D	E	F	G
1250 x 1250	1112	1210	60	4	60	90 ÷ 105
1200 x 1500	1074 x 1352	1160 x 1460	60	4	60	
1500 x 1500	1362	1460	60	4	60	

FRAME


L	M	N	O	*Gross weight*
1366 x 1366	1272 x 1272	110	200	30 kg
1316 x 1616	1222 x 1522	110	200	33 kg
1616 x 1616	1522 x 1522	110	200	36 kg

ELECTRICAL CONNECTIONS




SHIELD	
+ SIGNAL	GREEN
■ + EXCITATION ■ + REF./SENSE	RED BLUE
- SIGNAL	WHITE
■ - EXCITATION ■ - REF./SENSE	BLACK YELLOW

■ where provided

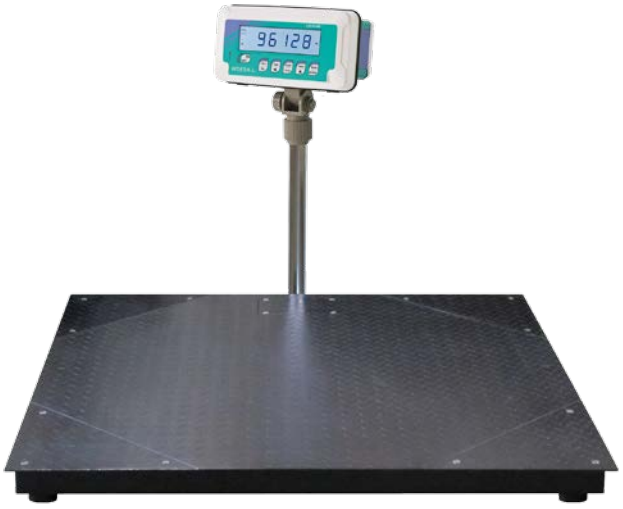

OPTIONS ON REQUEST

	DESCRIPTION
	TELP pit frame in galvanized steel with centering plates. For platforms: 1250x1250 mm 1200x1500 mm 1500x1500 mm
	MR access ramp in painted steel. Dimensions: 1250x1060x110 mm 1500x1060x110 mm
	Stainless steel indicator-holder column (Ø38 mm, height 700 mm). Painted steel bracket for floor mounting.
	AISI 304 stainless steel PPV constraint against lateral displacement and overturning (1 piece).
kg	Non-standard capabilities.

The Company reserves the right to make changes to the technical data, drawings and images without notice.

Rev. 0.0