




Capacity up to 3000 kg



- Painted steel platform.
- 4 FTP load cells in AISI 420 stainless steel - IP68 (on request: IP69K).
- IP67 stainless steel junction box with equalization board and 6-wire output cable (length: 5 m).
- Inspectable compartments for load cells and junction box.
- Galvanized steel adjustable feet, self-centering on sphere.
- Two M12 holes for lifting eyebolts.

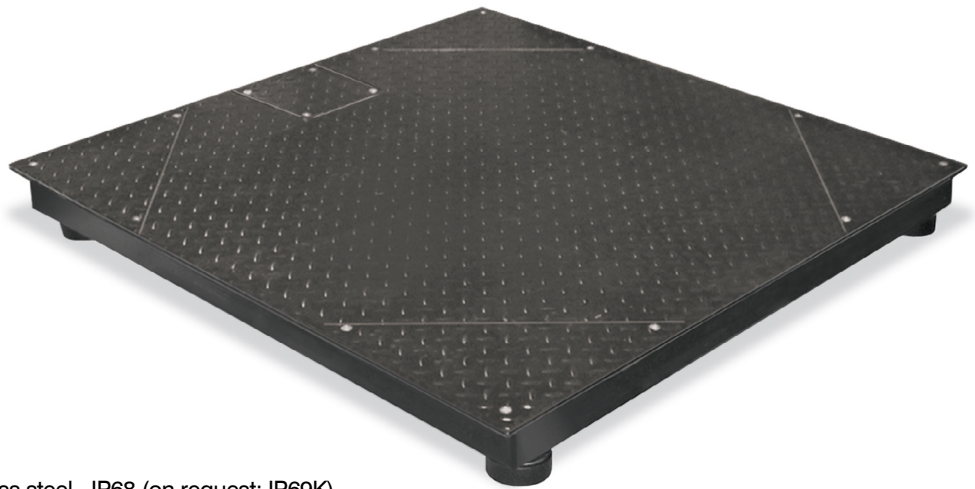

| CAPACITY | kg | ACCURACY CLASS C3 | | DIMENSION (mm) | WEIGHT (kg) | LOAD CELLS |
|----------|----|----------------------|---|----------------|-------------|-------------|
| 1500 | | • | • | 1250 x 1250 | 117 | FTP 500 kg |
| 1500 | | • | • | 1200 x 1500 | 131 | FTP 500 kg |
| 1500 | | • | • | 1500 x 1500 | 156 | FTP 500 kg |
| 3000 | | • | • | 1250 x 1250 | 117 | FTP 1000 kg |
| 3000 | | • | • | 1200 x 1500 | 131 | FTP 1000 kg |
| 3000 | | • | • | 1500 x 1500 | 156 | FTP 1000 kg |

ON REQUEST

CERTIFICATIONS



OIML R60 C3



Equivalent of the CE marking for the United Kingdom

CERTIFICATIONS ON REQUEST



Declaration of conformity + IP69K marking protection rating

Water protection in case of high-pressure or steam jet cleaning (test: pressurized water is sprayed from a distance of max 150 mm)
Water pressure: 100 bar; temperature: 80 °C; test duration: 250 seconds (reference standard: DIN 40050-9)



ATEX (zone 2-22)




ATEX (zone 1-21)



IECEx (zone 1-21)

P PAINTED STEEL PLATFORM - 4 LOAD CELLS IP68

DIMENSIONS (mm)

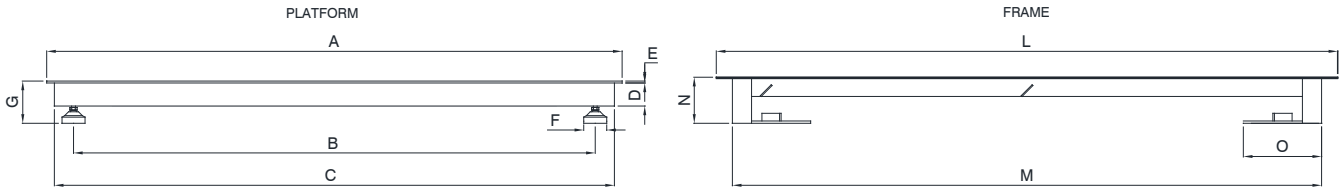



PLATFORM

| A | B | C | D | E | F | G |
|-------------|-------------|-------------|----|---|----|-----|
| 1250 x 1250 | 1112 | 1210 | 60 | 4 | 60 | 90 |
| 1200 x 1500 | 1074 x 1352 | 1160 x 1460 | 60 | 4 | 60 | ÷ |
| 1500 x 1500 | 1362 | 1460 | 60 | 4 | 60 | 105 |

FRAME

| L | M | N | O | Gross weight |
|-------------|-------------|-----|-----|--------------|
| 1366 x 1366 | 1272 x 1272 | 110 | 200 | 30 kg |
| 1316 x 1616 | 1222 x 1522 | 110 | 200 | 33 kg |
| 1616 x 1616 | 1522 x 1522 | 110 | 200 | 36 kg |

ELECTRICAL CONNECTIONS

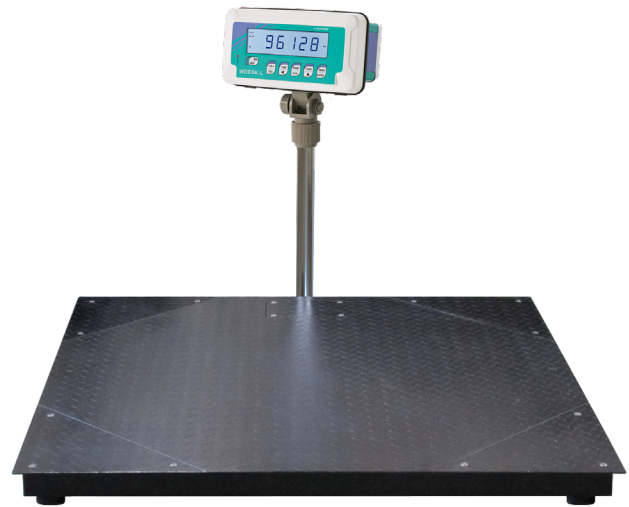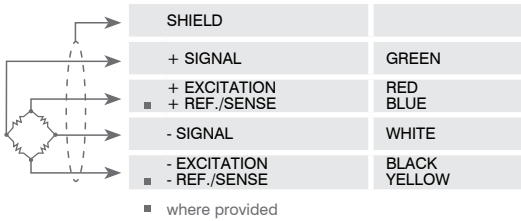

OPTIONS ON REQUEST

DESCRIPTION

| | |
|--|--|
| | <p>TELP pit frame in galvanized steel with centering plates. For platforms: 1250x1250 mm 1200x1500 mm 1500x1500 mm</p> |
| | <p>MR access ramp in painted steel. Dimensions: 1250x1060x110 mm 1500x1060x110 mm</p> |
| | <p>Stainless steel indicator-holder column (Ø38 mm, height 700 mm). Painted steel bracket for floor mounting.</p> |
| | <p>AISI 304 stainless steel PPV constraint against lateral displacement and overturning (1 piece).</p> |
| | <p>Non-standard capabilities.</p> |

The Company reserves the right to make changes to the technical data, drawings and images without notice.