





Capacity up to 3000 kg

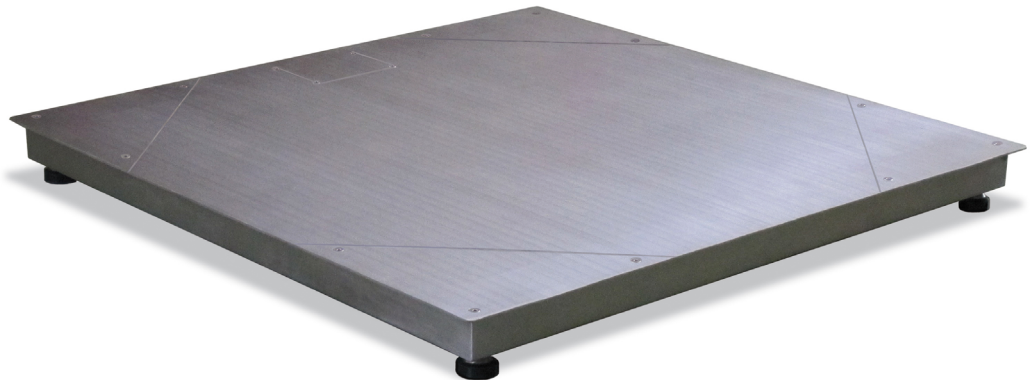

- AISI 304 stainless steel platform.
- 4 FT-P load cells in 17-4 PH stainless steel - IP68 (on request: IP69K).
- IP67 stainless steel junction box with equalization board and 6-wire output cable (length: 5 m).
- Inspectable compartments for load cells and junction box.
- AISI 304 stainless steel adjustable feet, self-centering on sphere.
- Two M12 holes for lifting eyebolts.



CAPACITY	kg	ACCURACY CLASS C3		DIMENSION (mm)	WEIGHT (kg)	LOAD CELLS
1500		•	•	1250 x 1250	117	FT-P 500 kg
1500		•	•	1500 x 1500	156	FT-P 500 kg
3000		•	•	1250 x 1250	117	FT-P 1000 kg
3000		•	•	1500 x 1500	156	FT-P 1000 kg

ON REQUEST

CERTIFICATIONS



OIML R60 C3



Equivalent of the CE marking for the United Kingdom

CERTIFICATIONS ON REQUEST



IP69K

Declaration of conformity + IP69K marking protection rating

Water protection in case of high-pressure or steam jet cleaning (test: pressurized water is sprayed from a distance of max 150 mm)
Water pressure: 100 bar; temperature: 80 °C; test duration: 250 seconds (reference standard: DIN 40050-9)



ATEX (zone 2-22)




ATEX (zone 1-21)



IECEx (zone 1-21)

DIMENSIONS (mm)

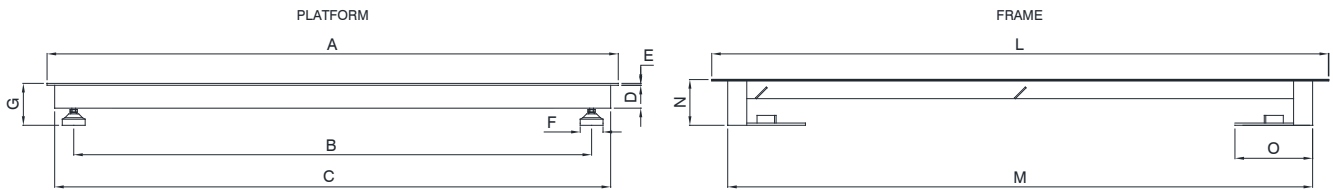


PLATFORM

A	B	C	D	E	F	G
1250 x 1250	1112	1210	60	4	60	90 ± 105
1500 x 1500	1362	1460	60	4	60	90 ± 105

FRAME

L	M	N	O	Gross weight
1366 x 1366	1272 x 1272	110	200	30 kg
1616 x 1616	1522 x 1522	110	200	36 kg

ELECTRICAL CONNECTIONS

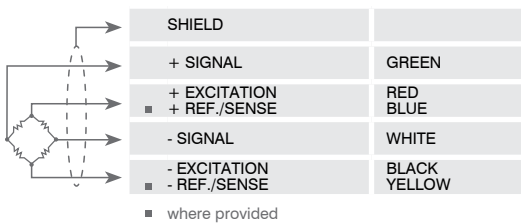

OPTIONS ON REQUEST

	DESCRIPTION
	TELP pit frame in galvanized steel with centering plates. For platforms: 1250x1250 mm 1500x1500 mm
	Stainless steel access MR ramp. Dimensions: 1250x1060x110 mm
	Stainless steel indicator-holder column (Ø38 mm, height 700 mm). Stainless steel bracket for floor mounting.
	AISI 304 stainless steel PPV constraint against lateral displacement and overturning (1 piece).
	Non-standard capabilities.

The Company reserves the right to make changes to the technical data, drawings and images without notice.