




Capacity up to 3000 kg



- AISI 304 stainless steel platform.
- 4 FT-P load cells in 17-4 PH stainless steel - IP68 (on request: IP69K).
- IP67 stainless steel junction box with equalization board and 6-wire output cable (length: 5 m).
- Inspectable compartments for load cells and junction box.
- AISI 304 stainless steel adjustable feet, self-centering on sphere.
- Two M12 holes for lifting eyebolts.

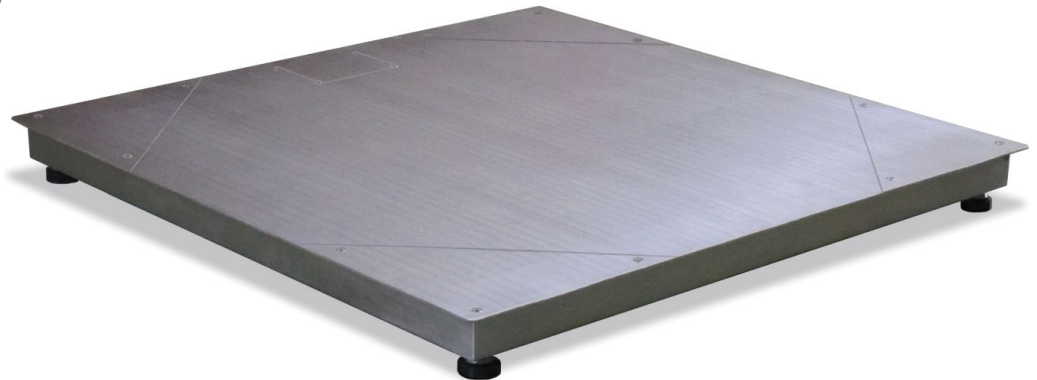

| CAPACITY | kg | ACCURACY CLASS<br>C3 |   | DIMENSION (mm) | WEIGHT (kg) | LOAD CELLS   |
|----------|----|----------------------|---|----------------|-------------|--------------|
| 1500     |    | •                    | • | 1250 x 1250    | 117         | FT-P 500 kg  |
| 1500     |    | •                    | • | 1500 x 1500    | 156         | FT-P 500 kg  |
| 3000     |    | •                    | • | 1250 x 1250    | 117         | FT-P 1000 kg |
| 3000     |    | •                    | • | 1500 x 1500    | 156         | FT-P 1000 kg |

ON REQUEST

### CERTIFICATIONS



OIML R60 C3



Equivalent of the CE marking for the United Kingdom

#### CERTIFICATIONS ON REQUEST



Declaration of conformity + IP69K marking protection rating

Water protection in case of high-pressure or steam jet cleaning (test: pressurized water is sprayed from a distance of max 150 mm)  
Water pressure: 100 bar; temperature: 80 °C; test duration: 250 seconds (reference standard: DIN 40050-9)




ATEX II 2GD (zone 1-2-21-22)



IECEx (zone 1-2-21-22)

### DIMENSIONS (mm)

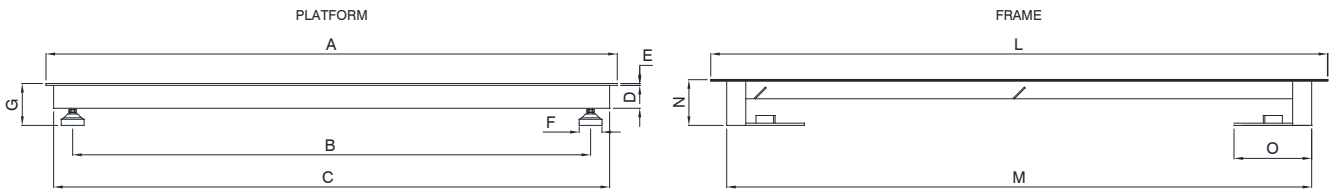


PLATFORM

| A           | B    | C    | D  | E | F  | G              |
|-------------|------|------|----|---|----|----------------|
| 1250 x 1250 | 1112 | 1210 | 60 | 4 | 60 | 90<br>±<br>105 |
| 1500 x 1500 | 1362 | 1460 | 60 | 4 | 60 | 90<br>±<br>105 |

FRAME

| L           | M           | N   | O   | Gross weight |
|-------------|-------------|-----|-----|--------------|
| 1366 x 1366 | 1272 x 1272 | 110 | 200 | 30 kg        |
| 1616 x 1616 | 1522 x 1522 | 110 | 200 | 36 kg        |

### ELECTRICAL CONNECTIONS

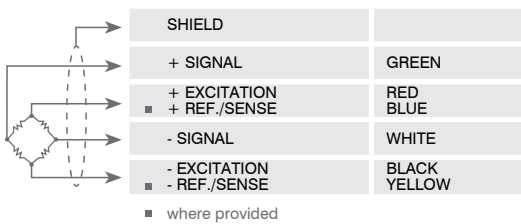

### OPTIONS ON REQUEST

|  | DESCRIPTION   |
|--|---|
|  | TEL P pit frame in galvanized steel with centering plates.<br>For platforms:<br>1250x1250 mm<br>1500x1500 mm    |
|  | Stainless steel access MR ramp.<br>Dimensions: 1250x1060x110 mm   |
|  | Stainless steel indicator-holder column (Ø38 mm, height 700 mm).<br>Stainless steel bracket for floor mounting. |
|  | AISI 304 stainless steel PPV constraint against lateral displacement and overturning (1 piece).                 |
|  | Non-standard capabilities.  |

The Company reserves the right to make changes to the technical data, drawings and images without notice.