



SWIVEL
DISPLAY
COLUMN

CAPACITY	kg	DIVISION	(g)	NET WEIGHT	(kg)	CODE
3/6		e=1/2		4.5		BILPA6
6/15		e=2/5		4.5		BILPA15
15/30		e=5/10		4.5		BILPA30

DESCRIPTION

- Stainless steel plate.
- RS232 output for connection to external printer.
- Backlit LCD displays on both sides, 3x 6-digit (20 mm height).
- 20-key waterproof keyboard.
- Bubble level and adjustable feet.
- 6 V rechargeable internal battery, 4 Ah capacity.
- Operating time: 70 hours.
- External battery charger 100-240 VAC included.
- Auto power-off.

MAIN FUNCTIONS

- Simultaneous display of: weight, unit price, amount.
- 100 storable items (PLU) with unit price.
- Price unit setting: €/kg - €/100 g.
- Automatic cancellation of price and tare.
- Totalization of partial amounts.
- Automatic change calculation.
- Optional non-fiscal receipt printing via STAVT II external printer: customizable header, date, time, net weight, unit price, amount per item, total amount.

CERTIFICATIONS



OIML R76:2006, class III, 3000 divisions




Equivalent of the CE marking for the United Kingdom



Conformity assessment (initial verification)

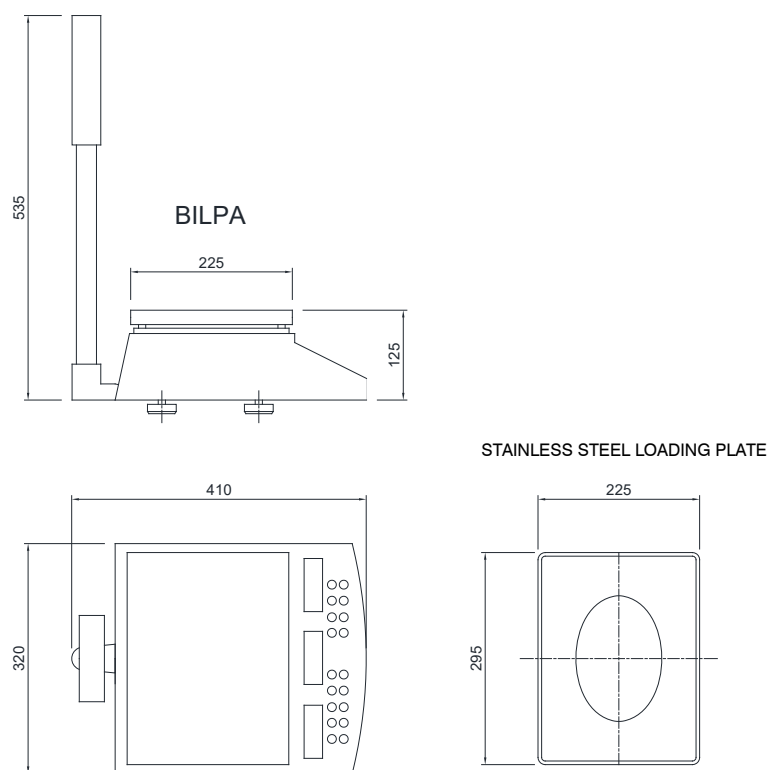


DIMENSIONS (mm)



TECHNICAL FEATURES

Power supply	100-240 VAC
Internal battery	6 V, 4 Ah capacity
Linearity	<0.01% full scale
Display resolution	3000
Units of measure	kg
Serial port	RS232
Baud rate	2400, 4800, 9600, 19200 (bit/s)
Humidity (condensate free)	<85%
Storage temperature	-10 °C +50 °C
Working temperature	-10 °C +40 °C

OPTIONS ON REQUEST

	DESCRIPTION	CODE
	Stainless steel deep tray. Dimensions: 230x300x40 mm.	PIATTOBAC
	Rechargeable battery 6 V, 4.5 Ah capacity.	BATTERIA6V4AH
	Desktop thermal printer.	STAVTII

The Company reserves the right to make changes to the technical data, drawings and images without notice.