

WELMEC 2.8

Issue 2

May 2012

WELMEC

European cooperation in legal metrology

Guide for conversion of NAWI (Indicator) Test results for AWI purposes



WELMEC

European cooperation in legal metrology

WELMEC is a co-operation between the legal metrology authorities of the Member States of the European Union and EFTA.

This document is one of a number of Guides published by WELMEC to provide guidance to manufacturers of measuring instruments and to Notified Bodies responsible for conformity assessment of their products.

The Guides are purely advisory and do not themselves impose any restrictions or additional technical requirements beyond those contained in relevant EU Directives.

Alternative approaches may be acceptable, but the guidance provided in this document represents the considered view of WELMEC as to the best practice to be followed.

Published by:
WELMEC Secretariat

E-mail: secretary@welmec.org
Website: www.welmec.org

Foreword

The objective of this guide is to supply the background to simply using results of tests performed on NAWIs based on EN 45501 and OIML R76/2006 to issue type examination and design examination certificates according to MID for instruments covered by the following OIML recommendations:

R51
R61
R107

A main prerequisite is that the AWI that is to be approved on these test results is not working dynamically (load in relative motion to the load receptor when being weighed), that is this guide does not cover e.g. checkweighers equipped with conveyors that do not stop for weighing. However, with instruments filling material e.g. in a weighing hopper this guide is applicable, although the material may not be completely at rest when being weighed.

Another condition is that the load cells intended to be used have been tested on basis of OIML R60 or of OIML R76 as far as applicable.

Furthermore users shall consider that MID may require additional tests and different test levels.

Instead of offering detailed schemes for calculation the guide shows the principle and, if useful, supplies examples to make necessary calculation more transparent (e.g. for gravimetric filling instruments).

When cited the requirements are taken from the following OIML recommendations:

- R51/2006
- R61/2004
- R76/2006
- R107/2007

The guide is divided into three chapters:

- I. Automatic catch weighers
- II. Discontinuous totalizers
- III. Automatic gravimetric filling instruments

Contents

General considerations.....	5
I Automatic catchweighers (OIML R51, MID MI-006 Chapter II).....	5
II Discontinuous totalisers.....	6
III Automatic gravimetric filling instruments.....	6

General considerations

When converting test results from R76 to R51/ R61/ R107 normally

- A module including the A/D converter (indicator analog data processing unit) has been tested, to which neither a verification scale interval "e" nor a scale interval "d" in units of mass has been assigned but only a minimum signal voltage in microvolt per "e" or "d" and a maximum number of scale intervals.
- The manufacturer wants to build a wide range of types of instruments with different maximum loads (Max), minimum load (Min) and (verification) scale intervals (e, d).

I Automatic catchweighers (OIML R51, MID MI-006 Chapter II)

- I.A.** The catchweigher may almost be considered as an automated NAWI. A similar error regime applies for catchweighers instruments of accuracy class Y (see R51-1, No. 2.5.1.2), yet allowing an extra error portion with regard to accuracy of zero setting and effects of automatic (dynamic) operation.

The error of zero plays an important part especially for those instruments that do not perform a zero setting before each weighing. The error of zero directly adds to the error of the weighing. Thus the following zero errors have to be considered:

- a) Zero error due to warm up effects: Error at zero must have been checked during warm up time test according to EN 45501 / R76 otherwise this test has to be repeated for zero.
- b) Zero error due to temperature drift: The results of the "Temperature effect on the no-load indication" test (R76, A.5.3.2) have to be taken into account. Since OIML R51 (A.3.5), R61 (A.3.3), R76 (A.4.1.2), R107 (A.3.3) and IEC 60068 assume a change of temperature of not more than 5 K/h and R76 requires zero drift to be checked per 5 K, the zero drift error due to change of temperature can be calculated for a certain period of time. Vice versa the longest time interval between zero settings may be calculated on basis of the maximum permissible error of zero and the measured drift over temperature difference of 5 K (temperature differences are not expressed in °C but in K = Kelvin, however this does not matter for the calculations).

I.B. Calculation examples for considering zero error

- a) Assumptions: Drift of zero during warm up time of 0.5 h: $\Delta z = 1 \text{ e}$, linear drift over time

After 15 minutes the drift is supposed to have reached the 0.5 e limit for allowed inaccuracy of zero. So at latest after 15 minutes the instrument has to be re-set to zero.

If zero drift has not been observed because the NAWI has been set to zero each time before applying the load, then the test should be repeated observing zero, but applying weights (zero and Max) more often than prescribed by R76. The reason is that the tendency of the drift might change and with longer periods of time between reading zero the maximum absolute drift may be missed. Thus at least zero should be read e.g. every minute.

- b) Assumptions: Drift of zero due to temperature drift: $0.25 \text{ e} / 5 \text{ K}$

Provided temperature drift does not exceed 5 K per hour, the maximum drift of zero (that is zero error) of 0.5 e is reached after:

$0.25 \text{ e} / 5 \text{ K} \text{ at } 5 \text{ K/h leads to } 0.5 \text{ e} / 2 \text{ h}$, that is the instrument has to reset to zero at latest after 2 h.

II Discontinuous totalisers

- II.A** For totalisers employing the principle of discharge weighing the drift of zero due to warm up effects or due to temperature drift does not affect the weighing result since the instrument is tared before each discharge (weighing).

For instruments that do not perform tare after each discharge the maximum zero error is $1 d_t$ (instrument having an *automatic* zero setting device) or $0.5 d_t$ (instrument having a *nonautomatic* or a *semi-automatic* zero setting device). The error of zero directly adds to the error of the weighing. Thus the following zero errors have to be considered:

- Zero error due to warm up effects: Error at zero must have been checked during warm up time test otherwise this test has to be repeated for zero.
- Zero error due to temperature drift: The results of the “Temperature effect on the no-load indication” test (R76, A.5.3.2) have to be taken into account. Since OIML / IEC assumes a change of temperature of not more than 5 K/h and R76 require zero drift to be checked per 5 K the zero drift error due to change of temperature can be calculated for a certain period of time. Vice versa the longest time interval between zero setting may be calculated on basis of the maximum permissible error of zero and the measured drift over temperature difference of 5 K.

II.B. Calculation examples for considering zero error

- Assumptions: Drift of zero during warm up time of 0.5 h: $\Delta z = 1 e$, linear drift over time, automatic zero setting device is working.
After 30 minutes the drift is supposed to have reached the 1 e limit for allowed inaccuracy of zero. So at latest after 30 minutes the instrument has to be re-set to zero again.
If zero drift has not been observed since the NAWI has been set to zero each time before applying the load, then the test should be repeated observing zero, but reading weights (zero and Max) more often than prescribed by R76. The reason is that the tendency of the drift might change and with longer periods of time between reading zero the maximum absolute drift may be missed. Thus at least zero should be read e.g. every minute.
- Assumptions: Drift of zero due to temperature drift: $0.25 e / 5 K$, automatic zero setting device is working
Provided temperature drift does not exceed 5 K per hour, the maximum drift of zero (that is zero error) of 1 e is reached after:

 $0.25 e / 5 K \text{ at } 5 K / h \text{ leads to } 1 e / 4 h$ that is the instrument has to reset to zero at latest after 4 h.

II.C Special matters to be considered

According to old OIML R107 (1997) the retained total shall also be checked under disturbances. This requirement has been dropped in the 2007 issue of OIML R107-1. However, transient disturbances may have an effect on the totalisation if the totaliser does not use the stability of equilibrium criteria of the totaliser. Then the indication has to be observed for transient changes under disturbances.

III Automatic gravimetric filling instruments

III.A Tests of importance for conversion

Basic conditions:

- A module including the A/D converter (indicator analog data processing unit) has been tested, to which neither a verification scale interval “e” nor a scale interval “d” in

units of mass has been assigned but only a minimum signal voltage in microvolt per "e" or "d" and a maximum number of scale intervals.

- The manufacturer wants to build a wide range of types of instruments with different maximum loads (Max), minimum load (Min) and scale intervals (d), as well as different Minfills.
- Minfill is unknown.

Influence factors and disturbances having an effect on the result of the fill:

1. The change of span

Tests to be considered: temperature and damp heat

2. The change of zero

Tests to be considered: accuracy of zero / tare setting, temperature (drift of zero), warm up (drift of zero)

3. Faults due to disturbances

Tests to be considered: short time power reductions, bursts, surge, electrostatic discharges, radiated electromagnetic fields, conducted radio-frequency fields

Note:

Transitory faults can be very critical to filling machines, but these are not considered while testing according to R76 since they are regarded as being obvious to the user. Yet, with filling machines this is different, since the instrument could consider the set value to be reached due to a temporary disturbance increasing the weight indication, and thus might open the flaps of the weighing hopper. This would lead to incorrect fillings. Therefore, the results of R76 disturbance tests cannot be generally accepted for conversion to R61, unless the transitory faults have been taken into account in the R76 report.

III.B Conversion of relevant test results

The error limits according R76 are based on the maximum number of scale intervals only, irrespective of the mass value of the scale interval, since they are given as fractions of the scale interval. This is not the case with R61 which introduces a completely different error regime based on the concrete mass values of the fill. Therefore the minimum microvolt per e / d or a corresponding number of digits have to be assigned to a concrete value of d in gram. The d has to be listed in the type approval certificate since the attainable minimum fill (Minfill) depends on this value. The smaller d is, the smaller the permissible Minfill will be. The value of d is independent of the minimum microvolt per d (e) the indicator is specified for, since it is the load cell of which the Max is crucial, provided that its output signal is sufficiently high to fulfill the requirement not to fall below the minimum voltage per d.

Generally the fill is affected by influences on the span and on zero of the instrument. The latter is especially critical for gravimetric filling machines because zero setting is normally not part of every weighing cycle. Thus any drift of zero directly affects the fill. This effect may be more significant than any effect on the span. This can be well seen from a comparison of R76 error limits to R61 error limits. Since the latter ones are (in principle) percentage error limits, the absolute maximum permissible error (mpe) for fills higher than 200 d according to R61 (setting error 0.25 mpd_{in service}) is much higher than the mpe according to R76, depending on the fill. The higher the fill related to d, the more uncritical is the R61 error limit compared to R76 (see figure 1).

Remarks:

For all following example calculations the percentage values instead of absolute values given in Table 1 of OIML R61 have been used. The reason can most easily be explained by giving the following example: The fill shall be e.g. 75 g. The maximum permissible deviation for this fill is 4.5 g. This is the maximum error also for the highest fill in this range (100 g) and would be the smallest relative (or percentage) permissible deviation of all fills between >50 g and ≤100 g. Thus taking this relative value of $mpd_{in\ service}$ is the worst case and will guarantee that for all fills smaller than 100 g within this range the $mpd_{in\ service}$ is not exceeded at any time.

All numbers of paragraphs appearing in the calculations are taken from the R61/2004 unless otherwise marked.

III.B.1. Change of span

The error limits of R76 (weighing performance) compared to error limits of R61 for influence factor test:

R61, 2.5 says: $mpd_{influence\ factors} = 0.25 mpd_{in\ service}$


Testing an indicator (module) p_i has to be considered: e.g. $p_i = 0.5$

Furthermore the reference accuracy class Ref(x) has to be considered.

The diagram (all values in gram) below shows the following example:

Based on $d = 1$ g and $p_i = 0.5$ and Ref(1) error limits according to R61 (continuous line) and according to R76 (dashed line):

Figure 1: R61 error limits (continuous line) in comparison to R76 error limits (dashed line)

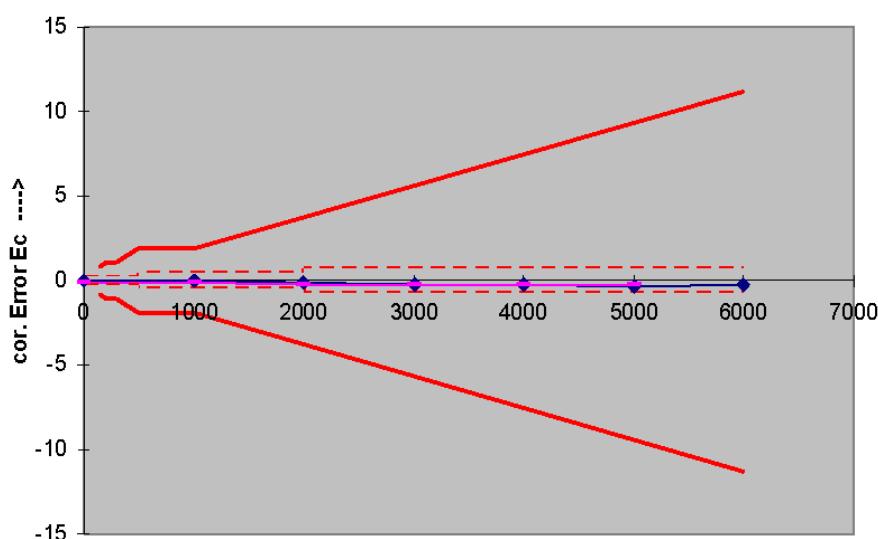

Example fill: 2000 g

Error limit according to R61:

$$mpd = \text{Fill} \cdot mpd_{in-service} \cdot 0.25 \text{ (No. 2.5 of R61)} \cdot \text{Ref}(x) \cdot p_i$$

$$mpd = 2000 \text{ g} \cdot 1.5 \% \cdot 0.25 \cdot 1 \cdot 0.5$$

$$mpd = 3.75 \text{ g}$$

Error limit according to R76 at a load corresponding to 2000 g:

$$mpe = 1 \text{ g} \cdot p_i = 1 \text{ g} \cdot 0.5 = 0.5 \text{ g}$$

From the graph one can perceive that the higher the fill, the higher is the difference between the R76 error limits and the R61 error limits. Therefore, it is sufficient to consider only small loads or, to be more precise, the minimum fill (Minfill). For automatic gravimetric filling machines the error at zero is more critical with regard to Minfill and thus first Minfill should be calculated on basis of the following ideas before checking whether e.g. span drift due to temperature has an effect.

III.B.2.The change of zero.

The change of zero is important to consider for every instrument that is not automatically set to zero before each weighing as the zero error is directly added to the weighing result.

Effects preventing the zero from being accurate:

A) Insufficient accuracy of zero / tare setting

$$\text{from 3.8: } \text{mpd(zero)} \leq 0.25 \cdot \text{mpd}(X)_{\text{in service}} \cdot \text{Min(fill)} \quad (3.8.2)$$

$$\Leftrightarrow \text{Min(fill)} \geq \text{mpd(zero)} / (0.25 \cdot \text{mpd}(X)_{\text{in service}})$$

The required accuracy for electronic weighing instruments according to R76 is limited to 0.25 e (or d). This fact leads to the absolutely smallest Minfills possible since the zero / tare setting error adds to the fill error under all conditions.

Example:

Non-automatic weighing instrument with $e = 1$ g, zero setting error being 0.25 g.
The reference accuracy class is $\text{Ref}(x) = 1$. Thus absolutely smallest Minfill is:

$$\text{Minfill} \geq 0.25 \text{ g} / (0.25 \cdot \text{mpd}(X)_{\text{in service}})$$

The problem is that $\text{mpd}(X)_{\text{in service}}$ is unknown since it depends on the (Min)fill. Thus as a first step the fill is estimated and a subsequent iteration is necessary. The iteration starts assuming that Minfill is smaller than 50 g, then

$$\text{mpd}(X)_{\text{in service}} = 9 \% \quad (2.2.2, \text{Table 1})$$

The first step of iteration:

$$\text{Minfill} \geq 0.25 \text{ g} / (0.25 \cdot 9 \%)$$

$$\text{Minfill} \geq 11.1 \text{ g and rounded to d}$$

$$\text{Minfill} \geq 11 \text{ g}$$

The Minfill of this instrument (having $d = 1$ g) can never be smaller than 11 g at a reference class $\text{Ref}(X) = 1$.

The same procedure must be followed for calculating all other possible Minfills depending on other values of scale interval d and other reference classes $\text{Ref}(X)$.

B) Temperature effect on no-load indication

$$\text{from A.6.2.2: } \Delta z_{\max} \leq 0.25 \cdot \text{mpd}_{\text{in service}} \cdot \text{Minfill} \cdot p_i \cdot \text{Ref}(X)$$

$$\Leftrightarrow \text{Minfill} \geq \Delta z_{\max} / (0.25 \cdot \text{mpd}_{\text{in service}} \cdot p_i \cdot \text{Ref}(X))$$

$$\text{mpd}_{\text{in service}} \rightarrow \text{from Table 1 (2.2.2)}$$

0.25 → from 2.5

The maximum zero drift depending on variation of temperature according to R76 is 1 e per 5 K ($^{\circ}$ C). The assumption made is that the maximum temperature drift is not more than 5 K / h. (This figure is taken from A.3.3 of R61, see also R76, A.4.1.2) The maximum time interval assumed to be chosen by the manufacturer between two zero settings is 2 hours. Thus the maximum zero drift to be considered is the theoretical drift within two hours, that is, twice the maximum value taken from the R76-2 protocol.

From the R76-2 protocol form the maximum zero drift has to be taken, and then Minfill can be calculated by iteration.

Example: $e = d = 1 \text{ g}$, $\text{Ref}(X) = 1$, $p_i = 0.5$, zero drift $1 \text{ e} / 5 \text{ K}$, $\text{mpd}_{\text{in service}} = 9 \%$ (assumption that $\text{Minfill} \leq 50 \text{ g}$)

$$\begin{aligned} \text{from A.6.2.2: } & \Delta z_{\max} \leq 0.25 \cdot \text{mpd}_{\text{in service}} \cdot \text{Minfill} \cdot p_i \cdot \text{Ref}(X) \\ \Leftrightarrow & \text{Minfill} \geq \Delta z_{\max} / (0.25 \cdot \text{mpd}_{\text{in service}} \cdot p_i \cdot \text{Ref}(X)) \end{aligned}$$

Assuming that the instrument is not set to zero before 2 h have elapsed:

$$\begin{aligned} \text{Minfill} & \geq (2 \text{ h} \cdot 1 \text{ e} / \text{h}) / (0.25 \cdot 9 \% \cdot 0.5 \cdot 1) \\ \Leftrightarrow \text{Minfill} & \geq (2 \text{ h} \cdot 1 \text{ g} / \text{h}) / (0.25 \cdot 9 \% \cdot 0.5 \cdot 1) \\ \Leftrightarrow \text{Minfill} & \geq 2 \text{ g} / (0.25 \cdot 9 \% \cdot 0.5 \cdot 1) \\ \Leftrightarrow \text{Minfill} & \geq 177.78 \text{ g} > 50 \text{ g} \text{ (assumption with regard to Minfill has been wrong)} \end{aligned}$$

Next iteration step: $\text{Minfill} \leq 200 \text{ g}$ and $\text{mpd}_{\text{in service}} = 4.5 \%$ (obviously leading to double the value calculated before)

$$\begin{aligned} \text{Minfill} & \geq 2 \text{ g} / (0.25 \cdot 4.5 \% \cdot 0.5 \cdot 1) \\ \Leftrightarrow \text{Minfill} & \geq 355.56 \text{ g} > 200 \text{ g} \text{ (assumption with regard to Minfill has been wrong)} \end{aligned}$$

Next iteration step: $\text{Minfill} \leq 500 \text{ g}$ and $\text{mpd}_{\text{in service}} = 3 \%$

$$\begin{aligned} \text{Minfill} & \geq 2 \text{ g} / (0.25 \cdot 3 \% \cdot 0.5 \cdot 1) \\ \Leftrightarrow \text{Minfill} & \geq 533.33 \text{ g} > 500 \text{ g} \text{ (assumption with regard to Minfill has been wrong)} \end{aligned}$$

Next iteration step: $\text{Minfill} \leq 1000 \text{ g}$ and $\text{mpd}_{\text{in service}} = 15 \text{ g}$, corresponding to 1.5 % (obviously leading to double the value calculated before)

$$\begin{aligned} \text{Minfill} & \geq 2 \text{ g} / (0.25 \cdot 1.5 \% \cdot 0.5 \cdot 1) \\ \Leftrightarrow \text{Minfill} & \geq 1066.67 \text{ g} \text{ (more than 1000 g, however for fills between 1000 g and 10,000 g a deviation of 1.5% is acceptable, thus 1067 g is the final permissible Minfill)} \end{aligned}$$

Shorter zero setting intervals:

In a lot of cases a zero setting interval of 2 h may not be adequate especially when caking and adhesive material is filled. Some notified bodies require even an interval of not more than 15 minutes. The following example shows what happens to Minfill when the maximum time interval between two zero settings is reduced to for example 15 minutes or 0.25 h respectively.

The maximum zero drift per 5 K and therefore per 1 h has been assumed to be 1 e ($e = 1 \text{ g}$). Thus in a quarter of an hour it cannot be more than 0.25 e. Minfill would then be:

$$\text{Minfill} \geq \Delta z_{\max} / (0.25 \cdot \text{mpd}_{\text{in service}} \cdot p_i \cdot \text{Ref}(X))$$

$$\text{Minfill} \geq 1 \text{ g} \cdot 0.25 / (0.25 \cdot 9\% \cdot 0.5 \cdot 1)$$

$$\Leftrightarrow \text{Minfill} \geq 0.25 \text{ g} / (0.25 \cdot 9\% \cdot 0.5 \cdot 1)$$

$$\Leftrightarrow \text{Minfill} \geq 22.2 \text{ g}$$

C) Warm up time

$$\text{from A.5.2: } E_0 - E_{0 \text{ init}} \leq 0.25 \cdot \text{mpd}_{\text{in service}} \cdot \text{Minfill} \cdot p_i \cdot \text{Ref}(X)$$

$$\Leftrightarrow \text{Minfill} \geq (E_0 - E_{0 \text{ init}}) / (0.25 \cdot \text{mpd}_{\text{in service}} \cdot p_i \cdot \text{Ref}(X))$$

$\text{mpd}_{\text{in service}}$ → from Table 1 (2.2.2)

0.25 → from 2.5

$\text{Ref}(X)$ → has to be chosen (may be given by manufacturer)

Remark: If $(E_0 - E_{0 \text{ init}}) < 0$ then the absolute value of $(E_0 - E_{0 \text{ init}})$ has to be used.

From the R76-2 protocol form the maximum zero drift due to warm up has to be taken, and then Minfill can be calculated by iteration.

Example: $e = d = 1 \text{ g}$, $\text{Ref}(X) = 1$, $p_i = 0.5$, zero drift due to warm up 3 e, $\text{mpd}_{\text{in service}} = 9\%$ (assumption that $\text{Minfill} \leq 50 \text{ g}$)

$$\text{Minfill} \geq (E_0 - E_{0 \text{ init}}) / (0.25 \cdot \text{mpd}_{\text{in service}} \cdot p_i \cdot \text{Ref}(X))$$

$$\Leftrightarrow \text{Minfill} \geq 3 \text{ g} / (0.25 \cdot 9\% \cdot 0.5 \cdot 1)$$

$$\Leftrightarrow \text{Minfill} \geq 266.6 \text{ g} > 200 \text{ g},$$

Assumption being Minfill between $>200 \text{ g}$ and $\leq 300 \text{ g}$.

$\text{mpd}_{\text{in service}} = 9 \text{ g}$. For a new calculation that has to be put in relation to the highest fill of this range, i.e. 300 g. The maximum percentage deviation would then be: $9 \text{ g} / 300 \text{ g} = 0.03 = 3\%$. (see remarks under III.B)

$$\text{Minfill} \geq 3 \text{ g} / (0.25 \cdot 3\% \cdot 0.5 \cdot 1)$$

$$\Leftrightarrow \text{Minfill} \geq 800 \text{ g} > 500 \text{ g}, \text{ next iteration step.}$$

Assumption being Minfill between $>500 \text{ g}$ and $\leq 1000 \text{ g}$.

$\text{mpd}_{\text{in service}} = 15 \text{ g}$. For a new calculation that has to be put in relation to the highest

fill of this range, i.e. 1000 g. The maximum percentage deviation would then be: 15 g / 1000 g = 0.015 = 1.5 %. (see initial remarks)

$$\text{Minfill} \geq 3 \text{ g} / (0.25 \bullet 1.5 \% \bullet 0.5 \bullet 1)$$

$$\Leftrightarrow \text{Minfill} \geq 1600 \text{ g} \leq 10000 \text{ g, iteration stops here.}$$

III.B.3. Faults due to disturbances

The significant fault for all disturbance tests is 0.25 of the maximum permissible deviation (mpd) of each fill for in-service verification, for a fill equal to the rated minimum fill (see T.4.2.6). Thus the maximum deviation must be

$$\text{md}_{\text{disturbance}} \leq 0.25 \bullet \text{mpd}_{\text{in service}} \bullet \text{Ref}(X) \bullet \text{Minfill}$$

($p_i = 1$ for disturbance tests; see WELMEC Guide 2.1)

$$\Leftrightarrow \text{Minfill} \geq \text{md}_{\text{disturbance}} / (0.25 \bullet \text{mpd}_{\text{in service}} \bullet \text{Ref}(X))$$

The significant fault for nonautomatic weighing instruments is 1 e. However, when testing without high resolution this could amount even to 1.5 e.

The following example is based on the assumption that the significant fault amounts to 1.5 e, while e = 1 g. The reference class of the instrument shall again be $\text{Ref}(x) = 1$. The error fraction p_i , however, now is not 0.5 but 1 because the susceptibility to disturbances is a feature of the indicator alone as well as the influence of variation of the supply voltage (see R76-1, C.2, Table 12). The expected Minfill is between >50 g and ≤ 100 g, so $\text{mpd}_{\text{in service}} = 4.5\%$

Then:

$$\text{Minfill} \geq \text{md}_{\text{disturbance}} / (0.25 \bullet \text{mpd}_{\text{in service}} \bullet \text{Ref}(X))$$

$$\Leftrightarrow \text{Minfill} \geq 1.5 \text{ g} / (0.25 \bullet 4.5 \% \bullet 1)$$

$$\Leftrightarrow \text{Minfill} \geq 133.3 \text{ g}$$

Since $\text{mpd}_{\text{in service}}$ for a fill of 133.3 g is 4.5% as well, no further calculations are necessary. A Minfill smaller than or equal to 50 g is not possible since maximum deviation due to disturbance would be:

$$\text{md}_{\text{disturbance}} \leq 0.25 \bullet \text{mpd}_{\text{in service}} \bullet \text{Ref}(X) \bullet \text{Minfill}$$

$$\Leftrightarrow \text{md}_{\text{disturbance}} \leq 0.25 \bullet 9 \% \bullet 1 \bullet 50 \text{ g}$$

$$\Leftrightarrow \text{md}_{\text{disturbance}} \leq 1.125 \text{ g}$$

Summary of example test results and conclusions

The Minfills based on the calculations above are:

Based on accuracy of zero / tare setting:	11 g	(rounded down)
Based on temperature effect on no-load indication	1067 g	(rounded up)
Based on warm up time	400 g	
Based on faults due to disturbances	133 g	(rounded down)

The highest Minfill (1067 g) has to be selected as being the worst case. The R61 error limit at this fill is $1067 \text{ g} \cdot 1.5\% \cdot 0.5 = 8 \text{ g}$. Comparing the figure to the error limit according to R76 (considering p_i being 0.5 g (1 g • 0.5) it is evident that normally the incorrect zero and the deviation due to disturbances are the crucial points. Thus the corresponding Minfills have to be calculated first and then the highest Minfill has to be compared to the R61 error limits (see figure 1) valid for temperature and damp heat tests.

III.C Calculating of Minfills with Selective Combination Weighers

Selective combination weighers have to be handled slightly differently as the fill is composed of many partial fills. Each weighing unit producing a partial fill produces its own partial errors due to influence factors and disturbances. However, corresponding to the addition of error fractions p_i within the frame of the modular approach, the single errors of the weighing units are added geometrically (see R61-1, A.6.1.3.1). The examples are based on the same data as for the single load filling instruments with the exception that the $e = d$ of the single load instrument now is considered being the d_{WU} of the single weighing unit.

$$d \geq d_{WU} \cdot \text{sqr}(i) \quad (\text{A.6.1.3.2})$$

III.C.1. The change of zero.

from 3.8.2 and A.6.1.3.2:

$$\text{mpd(zero)} \leq 0.25 \cdot (\text{mpd}(X)_{\text{in service}} \cdot \text{Min(fill)} / \text{sqr(lpf)})$$

[sqr(lpf) is the square root of the number of loads per fill]

A) Insufficient accuracy of zero / tare setting

The required accuracy for electronic weighing instruments according to R76 is limited to 0.25 e (or d_{WU}). This fact leads to the absolutely smallest Minfills possible since the zero / tare setting error adds to the fill error under all conditions.

$$0.25 d_{WU} \leq 0.25 \cdot (\text{mpd}(X)_{\text{in service}} \cdot \text{Min(fill)} / \text{sqr(lpf)})$$

$$\Leftrightarrow d_{WU} \geq \text{mpd}(X)_{\text{in service}} \cdot \text{Min(fill)} / \text{sqr(lpf)}$$

$$\Leftrightarrow \text{Min(fill)} \geq d_{WU} \cdot \text{sqr(lpf)} / \text{mpd}(X)_{\text{in service}}$$

Example:

Nonautomatic weighing instrument with $d_{WU} = 1 \text{ g}$, zero setting error being 0.25 g. The reference accuracy class is Ref(x) = 1. The average number of partial fills (loads per fill, "lpf") is 4. Thus absolutely smallest Minfill is:

$$\text{Minfill} \geq d_{WU} \cdot \text{sqr(lpf)} / \text{mpd}(X)_{\text{in service}}$$

The problem is that $\text{mpd}(X)_{\text{in service}}$ is unknown since it depends on the Minfill. Thus as a first step the fill is estimated and a subsequent iteration is necessary. The iteration starts assuming that Minfill is smaller than 50 g, then

$$\text{mpd}(X)_{\text{in service}} = 9 \% \quad (2.2.2, \text{Table 1})$$

The first step of iteration:

$$\text{Minfill} \geq 1 \text{ g} \cdot \text{sqr}(4) / 9 \%$$

$$\text{Minfill} \geq 22.2 \text{ g and rounded to } d$$

Minfill ≥ 22 g

The Minfill of this instrument (having $d_{WU} = 1$ g, average number of 4 loads per fill) can never be smaller than 22 g at a reference class Ref(X) = 1.

The same procedure must be followed for calculating all other possible Minfills depending on other values of scale interval d_{WU} and other reference classes Ref(X).

The following table shows the absolute minimum Minfills of a selective combination weigher with 4 loads per fill, related to d_{WU} , depending on normal accuracy of zero setting of NAWIs:

d_{WU} (g)	Minimum permissible value of Minfill (g) / lpf = 4			
	X(0.2)	X(0.5)	X(1)	X(2)
1	333	44	22	11
2	1 334	88	44	22
5	3 335	1 335	335	110
10	6 660	2 660	1 330	330
20	13 340	5 330	2 660	1 340
50	50 000	13 350	6 650	1 650
100	100 000	40 000	20 000	6 600
200	200 000	80 000	40 000	20 000
≥ 500	1000 d	500 d	200 d	100 d

As an alternative to the method above all calculations could be based on the d of whole filling instrument instead of d_{WU} of the weighing unit.

$d/\text{sqr}(lpf)$ $lpf = 4$	calculated d_{WU}	permissible d_{WU}	class X(1)	
			d rounded up Minfill	Minfill
2 g/2	1 g	1 g	22 g	22 g
5 g/2	2,5 g	2 g	44 g	45 g
10 g/2	5 g	5 g	110 g	110 g
20 g/2	10 g	10 g	1 330 g	1 340 g
50 g/2	25 g	20 g	2 660 g	2 700 g
100 g/2	50 g	50 g	6 650 g	6 700 g
200 g/2	100 g	100 g	20 000 g	20 000 g
500 g/2	250 g	200 g	40 000 g	40 000 g

B) Temperature effect on no-load indication

from A.6.2.2 and A.6.1.3.2:

$$\Delta z_{\max} \leq 0.25 \cdot mpd_{\text{in service}} \cdot \text{Minfill} \cdot p_i \cdot \text{Ref}(X) / \text{sqr}(lpf)$$

$$\Leftrightarrow \text{Minfill} \geq \Delta z_{\max} \cdot \text{sqr}(lpf) / (0.25 \cdot mpd_{\text{in service}} \cdot p_i \cdot \text{Ref}(X))$$

$$mpd_{\text{in service}} \rightarrow \text{from Table 1 (2.2.2)}$$

$$0.25 \rightarrow \text{from 2.5}$$

The maximum zero drift depending on variation of temperature according to R76 is 1 e per 5 K ($^{\circ}\text{C}$). The assumption made is that the maximum temperature drift is not more than 5 K / h. (This figure is taken from A.3.3 of R61, see also R76, A.4.1.2) The maximum time interval assumed to be chosen by the manufacturer between two zero settings is 2 hours. Thus the maximum zero drift to be considered is the theoretical drift within two hours, that is twice the maximum value taken from the R76-2 protocol.

From the R76-2 protocol form the maximum zero drift has to be taken, and then Minfill can be calculated by iteration.

Example: $e = d_{WU} = 1 \text{ g}$, $\text{Ref}(X) = 1$, $p_i = 0.5$, zero drift 1 e / 5 K, $mpd_{\text{in service}} = 9 \%$ (assumption that $\text{Minfill} \leq 50 \text{ g}$)

from A.6.2.2 and A.6.1.3.2:

$$\Delta z_{\max} \leq 0.25 \cdot mpd_{\text{in service}} \cdot \text{Minfill} \cdot p_i \cdot \text{Ref}(X) / \text{sqr}(lpf)$$

$$\Leftrightarrow \text{Minfill} \geq \Delta z_{\max} \cdot \text{sqr}(lpf) / (0.25 \cdot mpd_{\text{in service}} \cdot p_i \cdot \text{Ref}(X))$$

Assuming that the instrument is not set to zero before 2 h have elapsed:

$$\text{Minfill} \geq (2 \text{ h} \cdot 1 \text{ e} / \text{h}) \cdot \text{sqr}(4) / (0.25 \cdot 9 \% \cdot 0.5 \cdot 1)$$

$$\Leftrightarrow \text{Minfill} \geq (2 \text{ h} \cdot 1 \text{ g} / \text{h}) \cdot 2 / (0.25 \cdot 9 \% \cdot 0.5 \cdot 1)$$

$$\Leftrightarrow \text{Minfill} \geq 4 \text{ g} / (0.25 \cdot 9 \% \cdot 0.5 \cdot 1)$$

$$\Leftrightarrow \text{Minfill} \geq 355.56 \text{ g} > 50 \text{ g} \text{ (assumption with regard to Minfill has been wrong)}$$

Next iteration step: $\text{Minfill} \leq 500 \text{ g}$ and $\text{mpd}_{\text{in service}} = 3 \%$ (obviously leading to three times the value calculated before)

$$\text{Minfill} \geq 4 \text{ g} / (0.25 \cdot 3 \% \cdot 0.5 \cdot 1)$$

$$\Leftrightarrow \text{Minfill} \geq 1066.67 \text{ g} > 500 \text{ g} \text{ (assumption with regard to Minfill has been wrong)}$$

Next iteration step: $\text{Minfill} \leq 10000 \text{ g}$ and $\text{mpd}_{\text{in service}} = 1.5 \%$

$$\text{Minfill} \geq 4 \text{ g} / (0.25 \cdot 1.5 \% \cdot 0.5 \cdot 1)$$

$$\Leftrightarrow \text{Minfill} \geq 2133.33 \text{ g} < 10000 \text{ g} \text{ (for fill between 1000 g and 10,000 g a deviation of 1.5% is acceptable, thus 2133 g is the final permissible Minfill)}$$

C) Warm up time

$$\text{from A.5.2: } E_0 - E_{0I} \leq 0.25 \cdot \text{mpd}_{\text{in service}} \cdot \text{Minfill} \cdot p_i \cdot \text{Ref}(X) / \text{sqr(lpf)}$$

$$\Leftrightarrow \text{Minfill} \geq (E_0 - E_{0I}) \cdot \text{sqr(lpf)} / (0.25 \cdot \text{mpd}_{\text{in service}} \cdot p_i \cdot \text{Ref}(X))$$

$$\text{mpd}_{\text{in service}} \rightarrow \text{from Table 1 (2.2.2)}$$

$$0.25 \rightarrow \text{from 2.5}$$

$$\text{Ref}(X) \rightarrow \text{has to be chosen (may be given by manufacturer)}$$

Remark: If $(E_0 - E_{0I}) < 0$ then the absolute value of $(E_0 - E_{0I})$ has to be used.

From the R76-2 protocol form the maximum zero drift due to warm up has to be taken, and then Minfill can be calculated by iteration.

Example: $e = d = 1 \text{ g}$, $\text{Ref}(X) = 1$, $p_i = 0.5$, zero drift due to warm up 3 e, $\text{mpd}_{\text{in service}} = 9 \%$ (assumption that $\text{Minfill} \leq 50 \text{ g}$)

$$\text{Minfill} \geq (E_0 - E_{0\text{init}}) \cdot \text{sqr(lpf)} / (0.25 \cdot \text{mpd}_{\text{in service}} \cdot p_i \cdot \text{Ref}(X))$$

$$\Leftrightarrow \text{Minfill} \geq 3 \text{ g} \cdot \text{sqr}(4) / (0.25 \cdot 9 \% \cdot 0.5 \cdot 1)$$

$$\Leftrightarrow \text{Minfill} \geq 533.3 \text{ g} > 500 \text{ g},$$

Assumption being Minfill between $>500 \text{ g}$ and $\leq 1000 \text{ g}$.

$\text{mpd}_{\text{in service}} = 15 \text{ g}$. For a new calculation that has to be put in relation to the highest fill of this range, i.e. 1000 g . The maximum percentage deviation would then be: $15 \text{ g} / 1000 \text{ g} = 0.015 = 1.5 \%$. (see remarks under III.B)

$$\text{Minfill} \geq 3 \text{ g} \cdot \text{sqr}(4) / (0.25 \cdot 1.5 \% \cdot 0.5 \cdot 1)$$

$$\Leftrightarrow \text{Minfill} \geq 3200 \text{ g} \geq 1000 \text{ g}, \text{next iteration step.}$$

Minfill between >1000 g and ≤ 10000 g, $\text{mpd}_{\text{in service}} = 1.5\%$, thus Minfill is 3200 g, iteration stops here.

III.C.3. Faults due to disturbances

For selective combination weighers the significant fault for all disturbance tests is 0.25 of the maximum permissible deviation (mpd) of each fill for in-service verification, for a fill equal to the rated minimum fill (see T.4.2.5), however divided by the square root of loads per fill. Thus the maximum deviation must be

$$\text{md}_{\text{disturbance}} \leq 0.25 \cdot \text{mpd}_{\text{in service}} \cdot \text{Ref}(X) \cdot \text{Minfill} / \text{sqr(lpf)}$$

$$\Leftrightarrow \text{Minfill} \geq \text{md}_{\text{disturbance}} \cdot \text{sqr(lpf)} / (0.25 \cdot \text{mpd}_{\text{in service}} \cdot \text{Ref}(X))$$

Assuming again that the real fault for nonautomatic weighing instruments could amount to 1.5 e the following example is given.

While $e = 1$ g, the reference class of the instrument shall again be $\text{Ref}(x) = 1$, and the number of loads per fill shall be $\text{lpf} = 4$. The error fraction p_i , is again 1. (see R76-1, C.2.2, Table 12). The expected Minfill is between >100 g and ≤ 200 g, so $\text{mpd}_{\text{in service}} = 4.5\%$

Then:

$$\text{Minfill} \geq \text{md}_{\text{disturbance}} \cdot \text{sqr(lpf)} / (0.25 \cdot \text{mpd}_{\text{in service}} \cdot \text{Ref}(X))$$

$$\Leftrightarrow \text{Minfill} \geq 1.5 \text{ g} \cdot \text{sqr}(4) / (0.25 \cdot 4.5 \% \cdot 1)$$

$$\Leftrightarrow \text{Minfill} \geq 266.6 \text{ g}$$

Expectation has been wrong, thus next iteration:

Assumption Minfill between >300 g and ≤ 500 g, $\text{mpd}_{\text{in service}} = 3\%$

$$\Leftrightarrow \text{Minfill} \geq 1.5 \text{ g} \cdot \text{sqr}(4) / (0.25 \cdot 3 \% \cdot 1)$$

$$\Leftrightarrow \text{Minfill} \geq 400 \text{ g}$$

A Minfill smaller than or equal to 300 g is not possible since maximum deviation due to disturbance would be:

$$\text{md}_{\text{disturbance}} \leq 0.25 \cdot \text{mpd}_{\text{in service}} \cdot \text{Ref}(X) \cdot \text{Minfill}$$

$$\Leftrightarrow \text{md}_{\text{disturbance}} \leq 0.25 \cdot 3 \% \cdot 1 \cdot 300 \text{ g}$$

$$\Leftrightarrow \text{md}_{\text{disturbance}} \leq 2.25 \text{ g}$$